

For additional fluids information, see the **FLUID MECHANICS** section.

TRANSPORTATION

U.S. Customary Units

a = deceleration rate (ft/sec²)

A = absolute value of algebraic difference in grades (%)

e = superelevation (%)

f = side friction factor

$\pm G$ = percent grade divided by 100 (uphill grade "+")

h_1 = height of driver's eyes above the roadway surface (ft)

h_2 = height of object above the roadway surface (ft)

L = length of curve (ft)

L_s = spiral transition length (ft)

R = radius of curve (ft)

S = stopping sight distance (ft)

t = driver reaction time (sec)

V = design speed (mph)

v = vehicle approach speed (fps)

W = width of intersection, curb-to-curb (ft)

l = length of vehicle (ft)

y = length of yellow interval to nearest 0.1 sec (sec)

r = length of red clearance interval to nearest 0.1 sec (sec)

Vehicle Signal Change Interval

$$y = t + \frac{v}{2a \pm 64.4 G}$$

$$r = \frac{W + l}{v}$$


Stopping Sight Distance

$$S = 1.47 Vt + \frac{V^2}{30 \left(\left(\frac{a}{32.2} \right) \pm G \right)}$$

Transportation Models

See **INDUSTRIAL ENGINEERING** for optimization models and methods, including queueing theory.

Traffic Flow Relationships ($q = kv$)

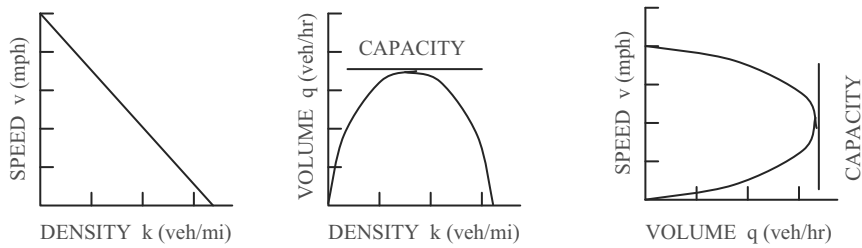

Vertical Curves: Sight Distance Related to Curve Length		
	$S \leq L$	$S > L$
Crest Vertical Curve General equation: Standard Criteria: $h_1 = 3.50$ ft and $h_2 = 2.0$ ft:	$L = \frac{AS^2}{100(\sqrt{2h_1} + \sqrt{2h_2})^2}$ $L = \frac{AS^2}{2,158}$	$L = 2S - \frac{200(\sqrt{h_1} + \sqrt{h_2})^2}{A}$ $L = 2S - \frac{2,158}{A}$
Sag Vertical Curve (based on standard headlight criteria)	$L = \frac{AS^2}{400 + 3.5S}$	$L = 2S - \left(\frac{400 + 3.5S}{A} \right)$
Sag Vertical Curve (based on riding comfort)	$L = \frac{AV^2}{46.5}$	
Sag Vertical Curve (based on adequate sight distance under an overhead structure to see an object beyond a sag vertical curve)	$L = \frac{AS^2}{800 \left(C - \frac{h_1 + h_2}{2} \right)}$	$L = 2S - \frac{800}{A} \left(C - \frac{h_1 + h_2}{2} \right)$
	C = vertical clearance for overhead structure (overpass) located within 200 feet of the midpoint of the curve	

Horizontal Curves	
Side friction factor (based on superelevation)	$0.01e + f = \frac{V^2}{15R}$
Spiral Transition Length	$L_s = \frac{3.15V^3}{RC}$ C = rate of increase of lateral acceleration [use 1 ft/sec ³ unless otherwise stated]
Sight Distance (to see around obstruction)	$HSO = R \left[1 - \cos \left(\frac{28.65S}{R} \right) \right]$ HSO = Horizontal sight line offset

Horizontal Curve Formulas

- D = Degree of Curve, Arc Definition
 PC = Point of Curve (also called BC)
 PT = Point of Tangent (also called EC)
 PI = Point of Intersection
 I = Intersection Angle (also called Δ)
 Angle Between Two Tangents
 L = Length of Curve, from PC to PT
 T = Tangent Distance
 E = External Distance
 R = Radius
 LC = Length of Long Chord
 M = Length of Middle Ordinate
 c = Length of Sub-Chord
 d = Angle of Sub-Chord
 l = Curve Length for Sub-Chord

$$R = \frac{5729.58}{D}$$

$$R = \frac{LC}{2 \sin(I/2)}$$

$$T = R \tan(I/2) = \frac{LC}{2 \cos(I/2)}$$

$$L = RI \frac{\pi}{180} = \frac{I}{D} 100$$

$$M = R[1 - \cos(I/2)]$$


$$\frac{R}{E + R} = \cos(I/2)$$

$$\frac{R - M}{R} = \cos(I/2)$$


$$c = 2R \sin(d/2)$$

$$l = Rd \left(\frac{\pi}{180} \right)$$

$$E = R \left[\frac{1}{\cos(I/2)} - 1 \right]$$

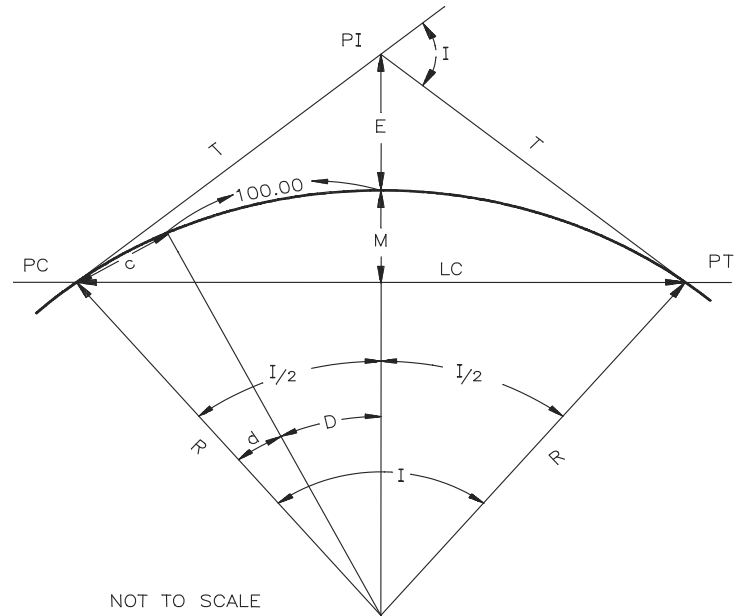


LATITUDES AND DEPARTURES

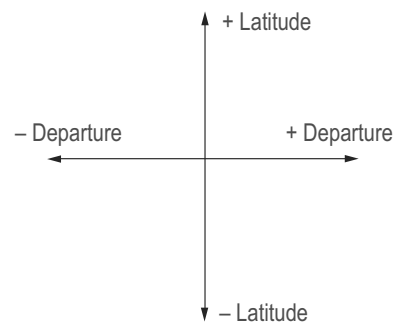

Deflection angle per 100 feet of arc length equals $D/2$

Vertical Curve Formulas

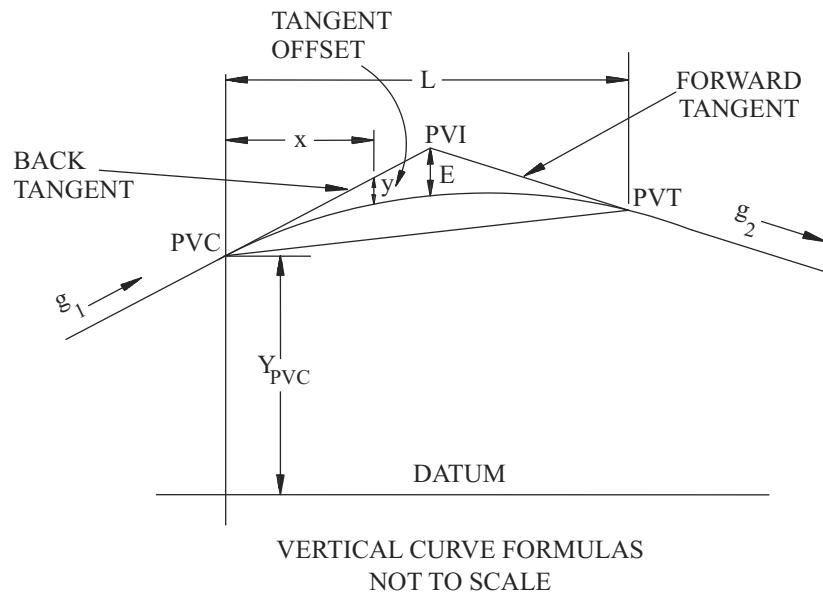

L = Length of Curve (horizontal)

PVC = Point of Vertical Curvature

PVI = Point of Vertical Intersection

PVT = Point of Vertical Tangency

g_1 = Grade of Back Tangent

x = Horizontal Distance from PVC to Point on Curve

g_2 = Grade of Forward Tangent

a = Parabola Constant

y = Tangent Offset

E = Tangent Offset at PVI

r = Rate of Change of Grade

$$x_m = \text{Horizontal Distance to Min/Max Elevation on Curve} = -\frac{g_1}{2a} = \frac{g_1 L}{g_1 - g_2}$$

$$\text{Tangent Elevation} = Y_{PVC} + g_1 x \text{ and } = Y_{PVI} + g_2 (x - L/2)$$

$$\text{Curve Elevation} = Y_{PVC} + g_1 x + ax^2 = Y_{PVC} + g_1 x + [(g_2 - g_1)/(2L)]x^2$$

$$y = ax^2 \quad a = \frac{g_2 - g_1}{2L} \quad E = a\left(\frac{L}{2}\right)^2 \quad r = \frac{g_2 - g_1}{L}$$

EARTHWORK FORMULAS

Average End Area Formula, $V = L(A_1 + A_2)/2$

Prismoidal Formula, $V = L(A_1 + 4A_m + A_2)/6$,

where A_m = area of mid-section, and

L = distance between A_1 and A_2

Pyramid or Cone, $V = h(\text{Area of Base})/3$

AREA FORMULAS

Area by Coordinates: $\text{Area} = [X_A(Y_B - Y_N) + X_B(Y_C - Y_A) + X_C(Y_D - Y_B) + \dots + X_N(Y_A - Y_{N-1})] / 2$

$$\text{Trapezoidal Rule: Area} = w\left(\frac{h_1 + h_n}{2} + h_2 + h_3 + h_4 + \dots + h_{n-1}\right)$$

w = common interval

$$\text{Simpson's 1/3 Rule: Area} = w\left[h_1 + 2\left(\sum_{k=3,5,\dots}^{n-2} h_k\right) + 4\left(\sum_{k=2,4,\dots}^{n-1} h_k\right) + h_n\right] / 3$$

n must be odd number of measurements

w = common interval

Table 3.1 Stopping Sight Distance

U.S. Customary					Metric				
Design speed (mi/h)	Brake reaction distance (ft)	Braking distance on level (ft)	Stopping sight distance		Design speed (km/h)	Brake reaction distance (m)	Braking distance on level (m)	Stopping sight distance	
			Calculated (ft)	Design (ft)				Calculated (m)	Design (m)
15	55.1	21.6	76.7	80	20	13.9	4.6	18.5	20
20	73.5	38.4	111.9	115	30	20.9	10.3	31.2	35
25	91.9	60.0	151.9	155	40	27.8	18.4	46.2	50
30	110.3	86.4	196.7	200	50	34.8	28.7	63.5	65
35	128.6	117.6	246.2	250	60	41.7	41.3	83.0	85
40	147.0	153.6	300.6	305	70	48.7	56.2	104.9	105
45	165.4	194.4	359.8	360	80	55.6	73.4	129.0	130
50	183.8	240.0	423.8	425	90	62.6	92.9	155.5	160
55	202.1	290.3	492.4	495	100	69.5	114.7	184.2	185
60	220.5	345.5	566.0	570	110	76.5	138.8	215.3	220
65	238.9	405.5	644.4	645	120	83.4	165.2	248.6	250
70	257.3	470.3	727.6	730	130	90.4	193.8	284.2	285
75	275.6	539.9	815.5	820					
80	294.0	614.3	908.3	910					

Note: Brake reaction distance is based on a time of 2.5 s; a deceleration rate of 11.2 ft/s² (3.4 m/s²) is used to determine calculated stopping sight distance.

Source: American Association of State Highway and Transportation Officials, *A Policy on Geometric Design of Highways and Streets*, Washington, DC, 2001.

Table 3.2 Design Controls for Crest Vertical Curves Based on Stopping Sight Distance

U.S. Customary				Metric			
Design speed (mi/h)	Stopping sight distance (ft)	Rate of vertical curvature, K^*		Design speed (km/h)	Stopping sight distance (m)	Rate of vertical curvature, K^*	
		Calculated	Design			Calculated	Design
15	80	3.0	3	20	20	0.6	1
20	115	6.1	7	30	35	1.9	2
25	155	11.1	12	40	50	3.8	4
30	200	18.5	19	50	65	6.4	7
35	250	29.0	29	60	85	11.0	11
40	305	43.1	44	70	105	16.8	17
45	360	60.1	61	80	130	25.7	26
50	425	83.7	84	90	160	38.9	39
55	495	113.5	114	100	185	52.0	52
60	570	150.6	151	110	220	73.6	74
65	645	192.8	193	120	250	95.0	95
70	730	246.9	247	130	285	123.4	124
75	820	311.6	312				
80	910	383.7	384				

*Rate of vertical curvature, K , is the length of curve per percent algebraic difference in intersecting grades (A):
 $K = L/A$.

Source: American Association of State Highway and Transportation Officials, *A Policy on Geometric Design of Highways and Streets*, Washington, DC, 2001.

Table 3.3 Design Controls for Sag Vertical Curves Based on Stopping Sight Distance

U.S. Customary				Metric			
Design speed (mi/h)	Stopping sight distance (ft)	Rate of vertical curvature, K^*		Design speed (km/h)	Stopping sight distance (m)	Rate of vertical curvature, K^*	
		Calculated	Design			Calculated	Design
15	80	9.4	10	20	20	2.1	3
20	115	16.5	17	30	35	5.1	6
25	155	25.5	26	40	50	8.5	9
30	200	36.4	37	50	65	12.2	13
35	250	49.0	49	60	85	17.3	18
40	305	63.4	64	70	105	22.6	23
45	360	78.1	79	80	130	29.4	30
50	425	95.7	96	90	160	37.6	38
55	495	114.9	115	100	185	44.6	45
60	570	135.7	136	110	220	54.4	55
65	645	156.5	157	120	250	62.8	63
70	730	180.3	181	130	285	72.7	73
75	820	205.6	206				
80	910	231.0	231				

*Rate of vertical curvature, K , is the length of curve per percent algebraic difference in intersecting grades (A): $K = L/A$.

Source: American Association of State Highway and Transportation Officials, *A Policy on Geometric Design of Highways and Streets*, Washington, DC, 2001.

TABLE 7-4 Minimum Radius for Limiting Values of *e* and *f*, Rural Highways and High-Speed Urban Streets

<i>Design Speed (mph)</i>	<i>Maximum <i>e</i> (%)</i>	<i>Limiting Values of <i>f</i></i>	<i>Total (<i>e</i>/100 + <i>f</i>)</i>	<i>Calculated Radius (ft)</i>	<i>Rounded Radius (ft)</i>
20	4.0	0.170	0.210	127.4	125
25	4.0	0.165	0.205	203.9	205
30	4.0	0.160	0.200	301.0	300
35	4.0	0.155	0.195	420.2	420
40	4.0	0.150	0.190	563.3	565
45	4.0	0.145	0.185	732.2	730
50	4.0	0.140	0.180	929.0	930
55	4.0	0.130	0.170	1,190.2	1,190
60	4.0	0.120	0.160	1,505.0	1,505
30	6.0	0.160	0.220	273.6	275
35	6.0	0.155	0.215	381.1	380
40	6.0	0.150	0.210	509.6	510
45	6.0	0.145	0.205	660.7	660
50	6.0	0.140	0.200	836.1	835
55	6.0	0.130	0.190	1,065.0	1,065
60	6.0	0.120	0.180	1,337.8	1,340
65	6.0	0.110	0.170	1,662.4	1,660
70	6.0	0.100	0.160	2,048.5	2,050
75	6.0	0.090	0.150	2,508.4	2,510
80	6.0	0.080	0.140	3,057.8	3,060
30	8.0	0.160	0.240	250.8	250
35	8.0	0.155	0.235	348.7	350
40	8.0	0.150	0.230	465.3	465
45	8.0	0.145	0.225	502.0	500
50	8.0	0.140	0.220	760.1	760
55	8.0	0.130	0.210	963.5	965
60	8.0	0.120	0.200	1,204.0	1,205
65	8.0	0.110	0.190	1,487.4	1,485
70	8.0	0.100	0.180	1,820.9	1,820
75	8.0	0.090	0.170	2,213.3	2,215
80	8.0	0.080	0.160	2,675.6	2,675
30	10.0	0.160	0.260	231.5	230
35	10.0	0.155	0.255	321.3	320
40	10.0	0.150	0.250	428.1	430
45	10.0	0.145	0.245	552.9	555
50	10.0	0.140	0.240	696.8	695
55	10.0	0.130	0.230	879.7	880
60	10.0	0.120	0.220	1,094.6	1,095
65	10.0	0.110	0.210	1,345.8	1,345
70	10.0	0.100	0.200	1,838.8	1,840
75	10.0	0.090	0.190	1,980.3	1,980
80	10.0	0.080	0.180	2,378.3	2,380

Source: From *A Policy on Geometric Design of Highways and Streets 2001*, copyright 2001. American Association of State Highway and Transportation Officials, Washington, DC. Used by permission.

QKU:

Linear Speed-Density Model

$$U = U_f \left(1 - \frac{K}{K_j} \right)$$

$$Q = U_f \left(K - \frac{K^2}{K_j} \right)$$

$$K = \frac{K_j \pm \sqrt{K_j^2 - \frac{4QK_j}{U_f}}}{2}$$

$$U = \frac{U_f \pm \sqrt{U_f^2 - \frac{4QU_f}{K_j}}}{2}$$

$$Q_{cap} = \frac{U_f K_j}{4}$$

$$U_{cap} = \frac{U_f}{2}$$

$$K_{cap} = \frac{K_j}{2}$$