

Transportation Economics and Decision Making



Lecture-11

Multicriteria Decision Making




- Decision criteria can have multiple dimensions
 - Dollars
 - Number of crashes
 - Acres of land, etc.
- All criteria are not of equal importance
- For a given criterion, different stakeholders may have different weights.

Typical Steps in Multi-Criteria Decision Making



Scaling

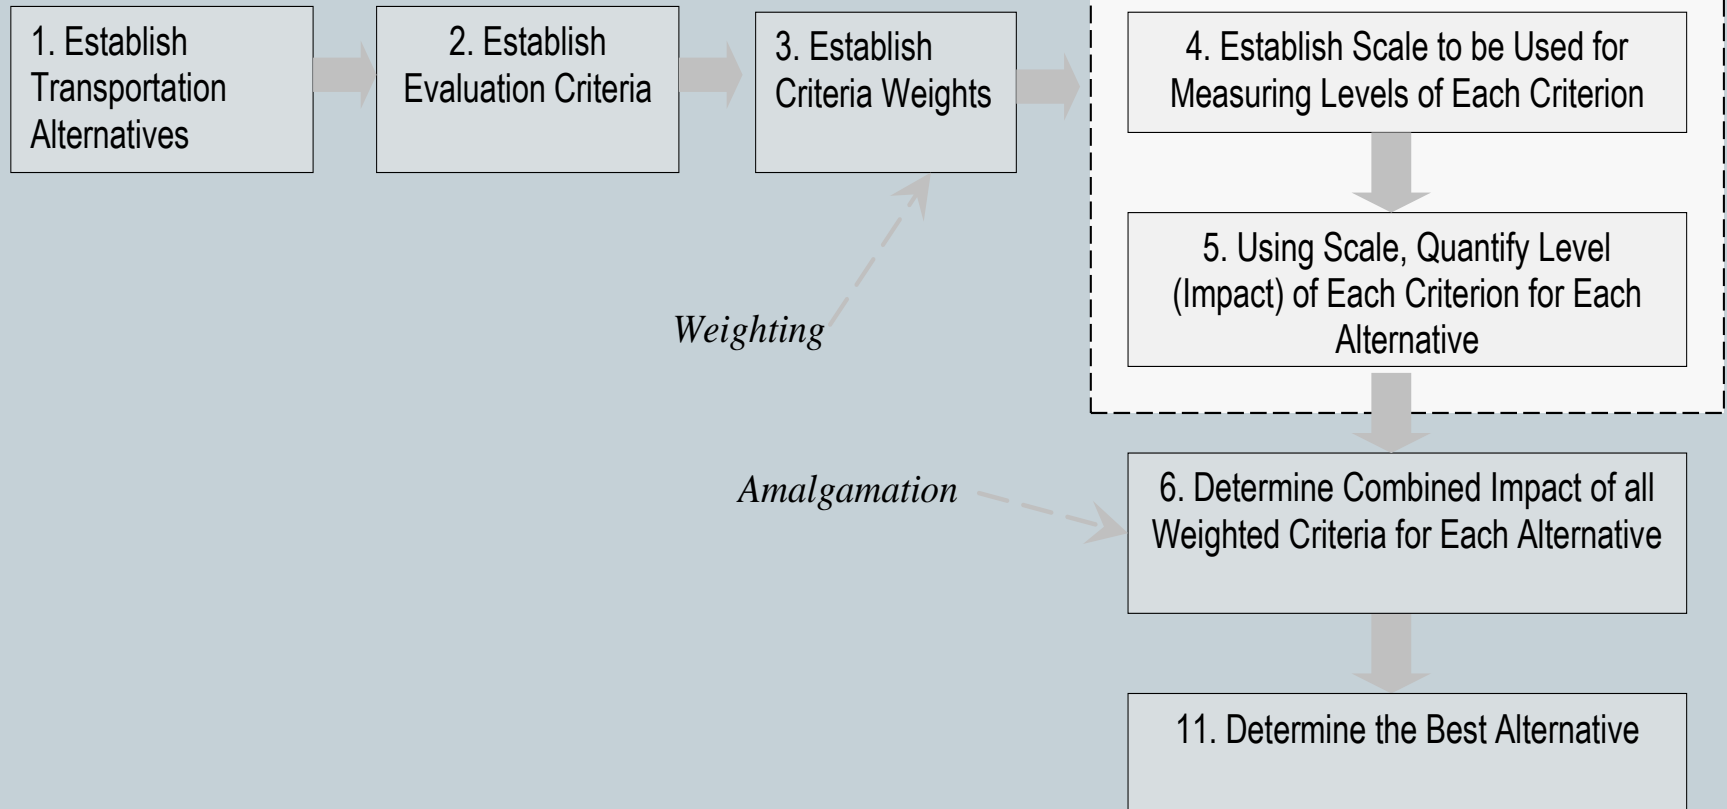

Typical Techniques



1. Equal Weights
2. Direct Weighting
3. Derived Weights
4. Delphi Technique
5. Gamble Method
6. Pair-wise comparison: AHP
7. Value Swinging

Analytical Hierarchy Process Overview



- AHP is a method for ranking several decision alternatives and selecting the best one when the decision maker has multiple objectives, or criteria, on which to base the decision.
- The decision maker makes a decision based on how the alternatives compare according to several criteria.
- The decision maker will select the alternative that best meets his or her decision criteria.
- AHP is a process for developing a numerical score to rank each decision alternative based on how well the alternative meets the decision maker's criteria.

Analytic Hierarchy Process

► **Step 1:** Structure a hierarchy. Define the problem, determine the criteria and identify the alternatives.

Overall Goal

Select the Best Alternative

Criteria

Cost

Reliability

Time Savings


Decision
Alternatives

A
B
C

A
B
C

A
B
C

Example Hierarchy

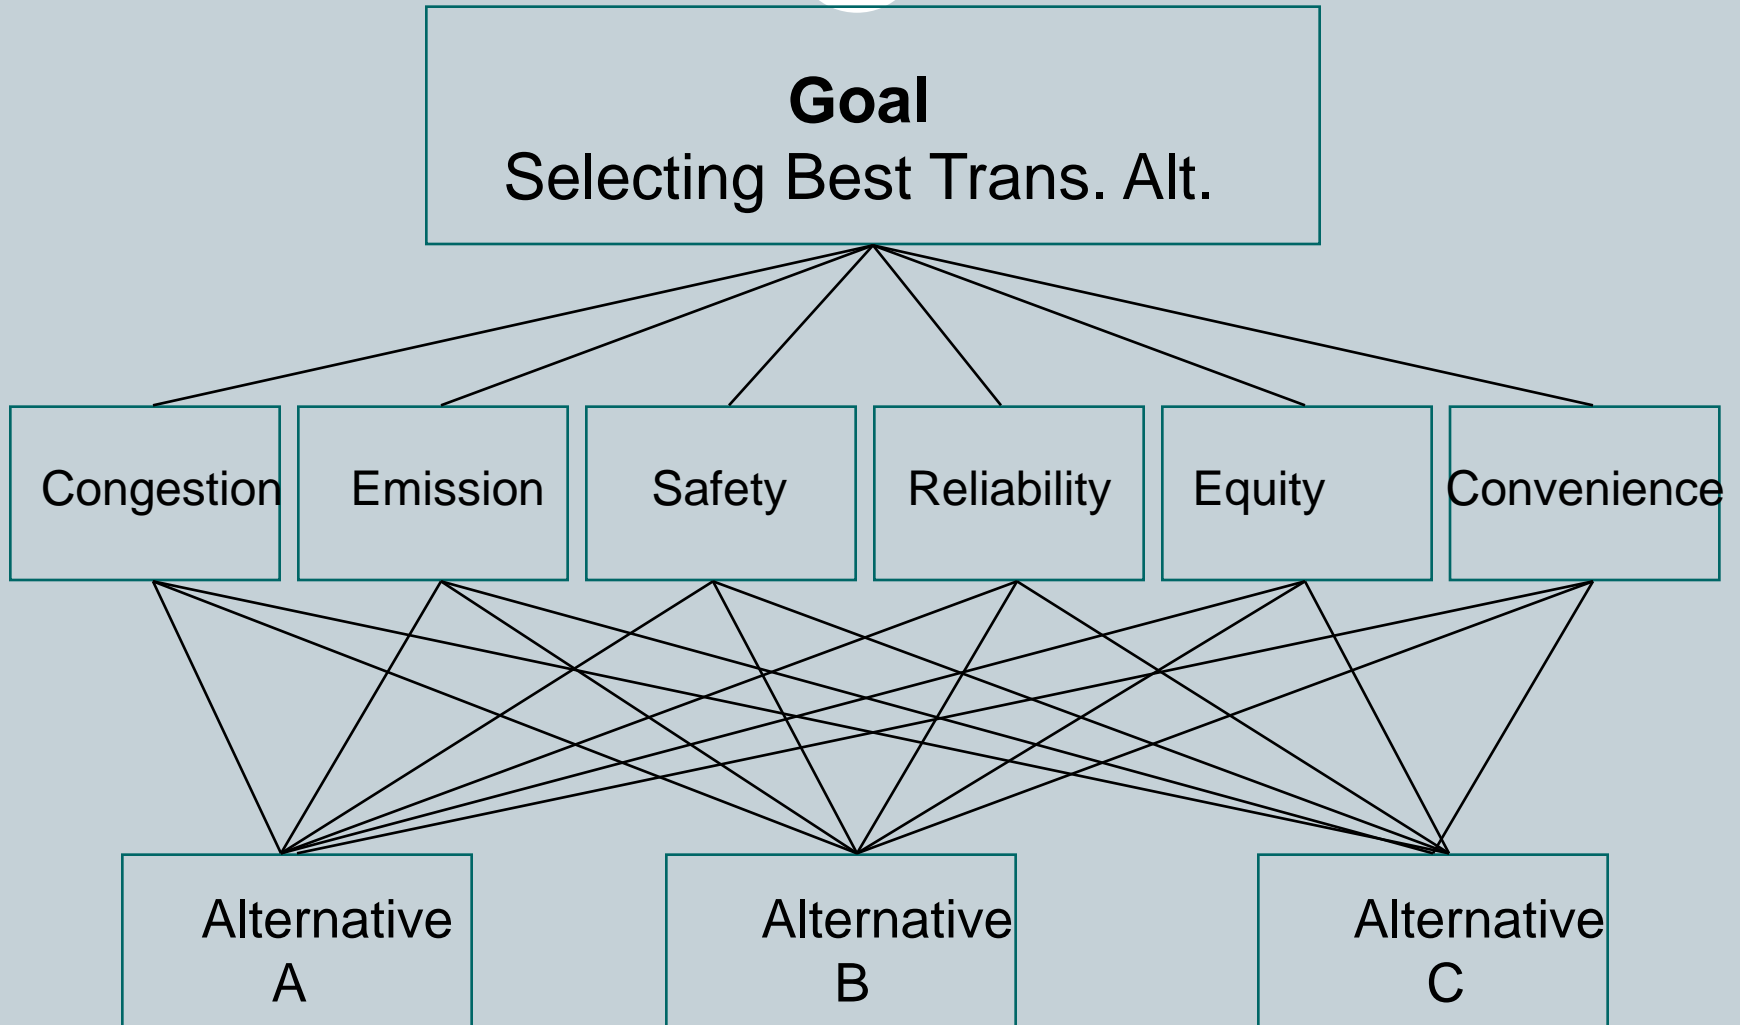

AHP Example Problem Statement



- Site selection for a potential traffic generator.
- Three potential sites:
 - A
 - B
 - C
- Criteria for site comparisons:
 - Customer market base.
 - Income level
 - Infrastructure

AHP Hierarchy Structure



- Top of the hierarchy: the objective (select the best site).
- Second level: how the four criteria contribute to the objective.
- Third level: how each of the three alternatives contributes to each of the four criteria.

AHP General Mathematical Process



- Mathematically determine preferences for sites with respect to each criterion.
- Mathematically determine preferences for criteria (rank order of importance).
- Combine these two sets of preferences to mathematically derive a composite score for each site.
- Select the site with the highest score.

AHP General Mathematical Process



- Mathematically determine preferences for sites with respect to each criterion.
- Mathematically determine preferences for criteria (rank order of importance).
- Combine these two sets of preferences to mathematically derive a composite score for each site.
- Select the site with the highest score.

AHP Pairwise Comparisons (1 of 2)



- In a pairwise comparison, two alternatives are compared according to a criterion and one is preferred.
- A preference scale assigns numerical values to different levels of performance.

AHP Pairwise Comparisons (2 of 2)



Preference Level	Numerical Value
Equally preferred	1
Equally to moderately preferred	2
Moderately preferred	3
Moderately to strongly preferred	4
Strongly preferred	5
Strongly to very strongly preferred	6
Very strongly preferred	7
Very strongly to extremely preferred	8
Extremely preferred	9

Example-1 (1)

✦ A pairwise comparison matrix summarizes the pairwise comparisons for a criteria.

	Customer Market		
Site	A	B	C
A	1	3	2
B	1/3	1	1/5
C	1/2	5	1

	Income Level	Infrastructure	Transportation
A	$\begin{bmatrix} 1 & 6 & 1/3 \end{bmatrix}$	$\begin{bmatrix} 1 & 1/3 & 1 \end{bmatrix}$	$\begin{bmatrix} 1 & 1/3 & 1/2 \end{bmatrix}$
B	$\begin{bmatrix} 1/6 & 1 & 1/9 \end{bmatrix}$	$\begin{bmatrix} 3 & 1 & 7 \end{bmatrix}$	$\begin{bmatrix} 3 & 1 & 4 \end{bmatrix}$
C	$\begin{bmatrix} 3 & 9 & 1 \end{bmatrix}$	$\begin{bmatrix} 1 & 1/7 & 1 \end{bmatrix}$	$\begin{bmatrix} 2 & 1/4 & 1 \end{bmatrix}$

Example-1 (2)



Site	Customer Market		
	A	B	C
A	1	3	2
B	1/3	1	1/5
C	<u>1/2</u>	<u>5</u>	<u>1</u>
	11/6	9	16/5

Site	Customer Market		
	A	B	C
A	6/11	3/9	5/8
B	2/11	1/9	1/16
C	3/11	5/9	5/16

Example-1 (3)



Customer Market

Site	<i>A</i>	<i>B</i>	<i>C</i>	Row Average
A	0.5455	0.3333	0.6250	0.5012
B	0.1818	0.1111	0.0625	0.1185
C	0.2727	0.5556	0.3125	<u>0.3803</u>
				1.0000

Example-1 (4)



- Preference vectors for other criteria are computed similarly resulting in the preference matrix

Criteria				
Site	MARKET	INCOME LEVEL	INFRASTRUCTURE	TRANSPORTATION
A	0.5012	0.2819	0.1790	0.1561
B	0.1185	0.0598	0.6850	0.6196
C	0.3803	0.6583	0.1360	0.2243

Example-1 (5)



Criteria	Market	Income	Infrastructure	Transportation
Market	1	1/5	3	4
Income	5	1	9	7
Infrastructure	1/3	1/9	1	2
Transportation	1/4	1/7	1/2	1

Criteria	Market	Income	Infrastructure	Transportation	Row Averages
Market	0.1519	0.1375	0.2222	0.2857	0.1993
Income	0.7595	0.6878	0.6667	0.5000	0.6535
Infrastructure	0.0506	0.0764	0.0741	0.1429	0.0860
Transportation	0.0380	0.0983	0.0370	0.0714	<u>0.0612</u>
					1.0000

Example-1 (6)



Preference Vector for Criteria:

Market	0.1993
Income	0.6535
Infrastructure	0.0860
Transportation	0.0612

Example-1 (7)



✦ Overall Score:

- ✦ Site A score = $.1993(.5012) + .6535(.2819) + .0860(.1790) + .0612(.1561) = .3091$
- ✦ Site B score = $.1993(.1185) + .6535(.0598) + .0860(.6850) + .0612(.6196) = .1595$
- ✦ Site C score = $.1993(.3803) + .6535(.6583) + .0860(.1360) + .0612(.2243) = .5314$

✦ Overall Ranking:

Site	Score
C	0.5314
A	0.3091
B	0.1595
	<u>1.0000</u>

AHP Steps



- ✦ Develop a pairwise comparison matrix for each decision alternative for each criteria.
- ✦ Synthesization
 - ◆ Sum the values of each column of the pairwise comparison matrices.
 - ◆ Divide each value in each column by the corresponding column sum.
 - ◆ Average the values in each row of the normalized matrices.
 - ◆ Combine the vectors of preferences for each criterion.
- ✦ Develop a pairwise comparison matrix for the criteria.
- ✦ Compute the normalized matrix.
- ✦ Develop the preference vector.
- ✦ Compute an overall score for each decision alternative
- ✦ Rank the decision alternatives.

AHP Consistency



Example: Site selection criteria is how consistent?

Step 1: Multiply the pairwise comparison matrix of the 4 criteria by its preference vector

	Market	Income	Infrastruc.	Transp.		Criteria
Market	1	1/5	3	4	X	0.1993
Income	5	1	9	7		0.6535
Infrastructure	1/3	1/9	1	2		0.0860
Transportation	1/4	1/7	1/2	1		0.0612

$$(1)(.1993) + (1/5)(.6535) + (3)(.0860) + (4)(.0612) = 0.8328$$

$$(5)(.1993) + (1)(.6535) + (9)(.0860) + (7)(.0612) = 2.8524$$

$$(1/3)(.1993) + (1/9)(.6535) + (1)(.0860) + (2)(.0612) = 0.3474$$

$$(1/4)(.1993) + (1/7)(.6535) + (1/2)(.0860) + (1)(.0612) = 0.2473$$

AHP Consistency



Step 2: Divide each value by the corresponding weight from the preference vector and compute the average

$$0.8328/0.1993 = 4.1786$$

$$2.8524/0.6535 = 4.3648$$

$$0.3474/0.0860 = 4.0401$$

$$0.2473/0.0612 = \underline{4.0422}$$

$$\underline{16.257}$$

$$\text{Average} = 16.257/4 \\ = 4.1564$$

Step 3: Calculate the Consistency Index (CI)

$CI = (\text{Average} - n)/(n-1)$, where n is no. of items compared

$$CI = (4.1564-4)/(4-1) = 0.0521$$

(CI = 0 indicates perfect consistency)

AHP Consistency



Step 4: Compute the Ratio CI/RI

where RI is a random index value obtained from Table below

N	2	3	4	5	6	7	8	9	10
RI	0	0.58	0.90	1.12	1.24	1.32	1.41	1.45	1.51

$$CI/RI = 0.0521/0.90 = 0.0580$$

Note: Degree of consistency is satisfactory if $CI/RI < 0.10$

AHP Decision-Example-2



- Purchasing decision involves, 3 model alternatives, and three decision criteria
- Pairwise comparison matrix

Bike	Price		
	X	Y	Z
X	1	3	6
Y	1/3	1	2
Z	1/6	1/2	1

Bike	Gear Action		
	X	Y	Z
X	1	1/3	1/7
Y	3	1	1/4
Z	7	4	1

Bike	Weight/Durability		
	X	Y	Z
X	1	3	1
Y	1/3	1	1/2
Z	1	2	1

Criteria	Price	Gears	Weight
Price	1	3	5
Gears	1/3	1	2
Weight	1/5	1/2	1

AHP Decision-Example-2



- **Step 1:** Develop normalized matrices and preference vectors for all the pairwise comparison matrices for criteria

Bike	Price			Row Averages
	X	Y	Z	
X	0.6667	0.6667	0.6667	0.6667
Y	0.2222	0.2222	0.2222	0.2222
Z	0.1111	0.1111	0.1111	<u>0.1111</u>
				1.0000

Bike	Gear Action			Row Averages
	X	Y	Z	
X	0.0909	0.0625	0.1026	0.0853
Y	0.2727	0.1875	0.1795	0.2132
Z	0.6364	0.7500	0.7179	<u>0.7014</u>
				1.0000

AHP Decision-Example-2



- **Step 1 continued:** Develop normalized matrices and preference vectors for all the pairwise comparison matrices for criteria.

Bike	Weight/Durability			Row Averages
	X	Y	Z	
X	0.4286	0.5000	0.4000	0.4429
Y	0.1429	0.1667	0.2000	0.1698
Z	0.4286	0.3333	0.4000	<u>0.3873</u>
				1.0000

Bike	Criteria		
	Price	Gears	Weight
X	0.6667	0.0853	0.4429
Y	0.2222	0.2132	0.1698
Z	0.1111	0.7014	0.3873

AHP Decision-Example-2



Step 2: Rank the criteria.

Criteria	Price	Gears	Weight	Row Averages
Price	0.6522	0.6667	0.6250	0.6479
Gears	0.2174	0.2222	0.2500	0.2299
Weight	0.1304	0.1111	0.1250	<u>0.1222</u>
				1.0000

Price	0.6479
Gears	0.2299
Weight	0.1222

AHP Decision-Example-2



Step 3: Develop an overall ranking.

Bike X

Bike Y

Bike Z

Bike X score = $.6667(.6479) + .0853(.2299) + .4429(.1222) = .5057$

Bike Y score = $.2222(.6479) + .2132(.2299) + .1698(.1222) = .2138$

Bike Z score = $.1111(.6479) + .7014(.2299) + .3873(.1222) = .2806$

Overall ranking of bikes: X first followed by Z and Y (sum of scores equal 1.0000).

Life Cycle Cost Analysis



- A method of calculating the cost of a system over its entire life span.
- It is an engineering economic analysis tool useful in comparing the relative merit of competing project implementation alternatives.


LCCA



- LCCA introduces a structured methodology, which accounts for the effects of agency activities on transportation users and provides a means to balance those effects with the construction, rehabilitation, and preservation needs of the system.
- ✱ Evaluate the economic effectiveness of different mutually exclusive investment alternatives over a certain period
- ✱ Identify the most cost-effective alternative

Cost Components of LCCA

32

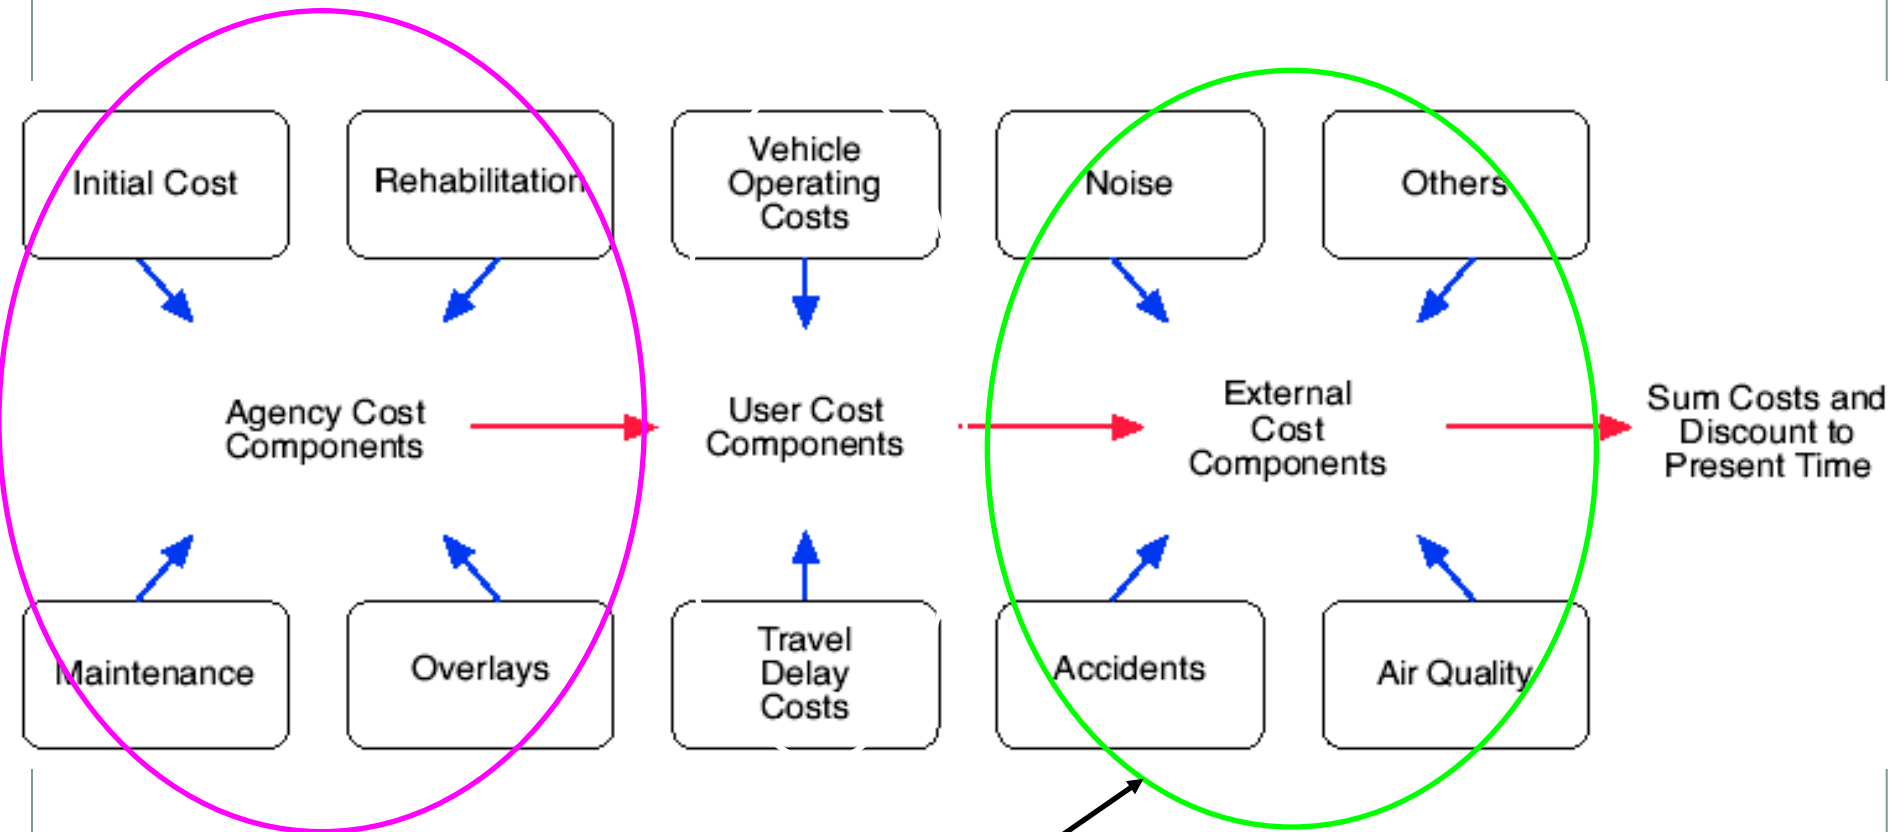

Since the cost for air quality, noise, etc. are not usually available, it is common practice to include accident costs only.

Life-Cycle Cost Analysis Steps

33

- Establish design alternatives
- Determine activity timing
- Estimate costs (agency and user)
- Compute life-cycle costs
- Analyze the results

Life-Cycle Cost Analysis (LCCA) Steps

34

- LCCA process begins with the development of alternatives to accomplish the structural and performance objectives for a project.
 - A “project” is a transportation improvement that fulfills the agency’s requirements to provide a given level of performance to the public.
 - A “project alternative” is a proposed means to provide that performance.
 - The economic difference between alternatives is dictated by total cost (when performance is similar).

Life-Cycle Cost Analysis (LCCA) Steps

35

- The analyst then defines the schedule of initial and future activities involved in implementing each project design alternative.
 - Note here that the alternatives should have the similar performance levels, otherwise, the project does not fulfill the objective

Life-Cycle Cost Analysis (LCCA) Steps

36

- The costs of these activities are estimated.
 - Note that in LCCA, both the agency cost (direct costs like construction and maintenance costs) and user costs (like vehicle operating and running costs) are commonly used.

Life-Cycle Cost Analysis (LCCA) Steps

37

- The predicted schedule of activities and their associated agency and user costs form the projected life-cycle cost stream for each alternative.
- The “discounting” of costs to present worth is performed for cost of the each alternatives.
- An analyst can then determine which one is the most “cost-effective” alternative.

Life-Cycle Cost Analysis (LCCA) Steps

38

- It is to be noted that the most-effective or the lowest cost life-cycle cost option may not necessarily be implemented when other considerations such as risk, available budgets, and political and environmental concerns are taken in to account.

LCCA provides critical information to the overall decision-making process, but not the final answer.

LCCA and Benefit-Cost Analysis

39

- **LCCA is a sub-set of benefit-cost analysis**
 - An agency that uses LCCA has already decided to undertake a project or improvement and is seeking to determine the most cost-effective means to accomplish the project's objectives.
 - LCCA is applied only to compare project implementation alternatives that would yield the same level of service and benefits to the project user at any specific volume of traffic.

LCCA and Benefit-Cost Analysis (continued)

- LCCA should consider the costs accrued to the users of the project facility, especially costs associated with increased congestion and reduced safety experienced during project construction and maintenance in addition to the cost
- LCCA does not consider the benefits of an improvement and therefore can not be used to compare design alternatives that do not yield identical benefits.
- Unlike LCCA, benefit-cost analysis can be used to determine whether or not a project should be undertaken at all.

LCCA and Benefit-Cost Analysis (continued)


41

- In Summary, LCCA is a cost-centric approach used to select the most cost-effective alternative that accomplishes a pre-selected project at a specific level of benefits that is assumed to be equal among project alternatives considered.

Analysis Period




- A time frame that is sufficiently long to reflect differences in performance among different strategy alternatives.
- It is necessary to select an analysis period over which the alternatives are compared.
- Analysis period (for rehabilitation project) is considered starting at the end of the performance period of the original pavement.

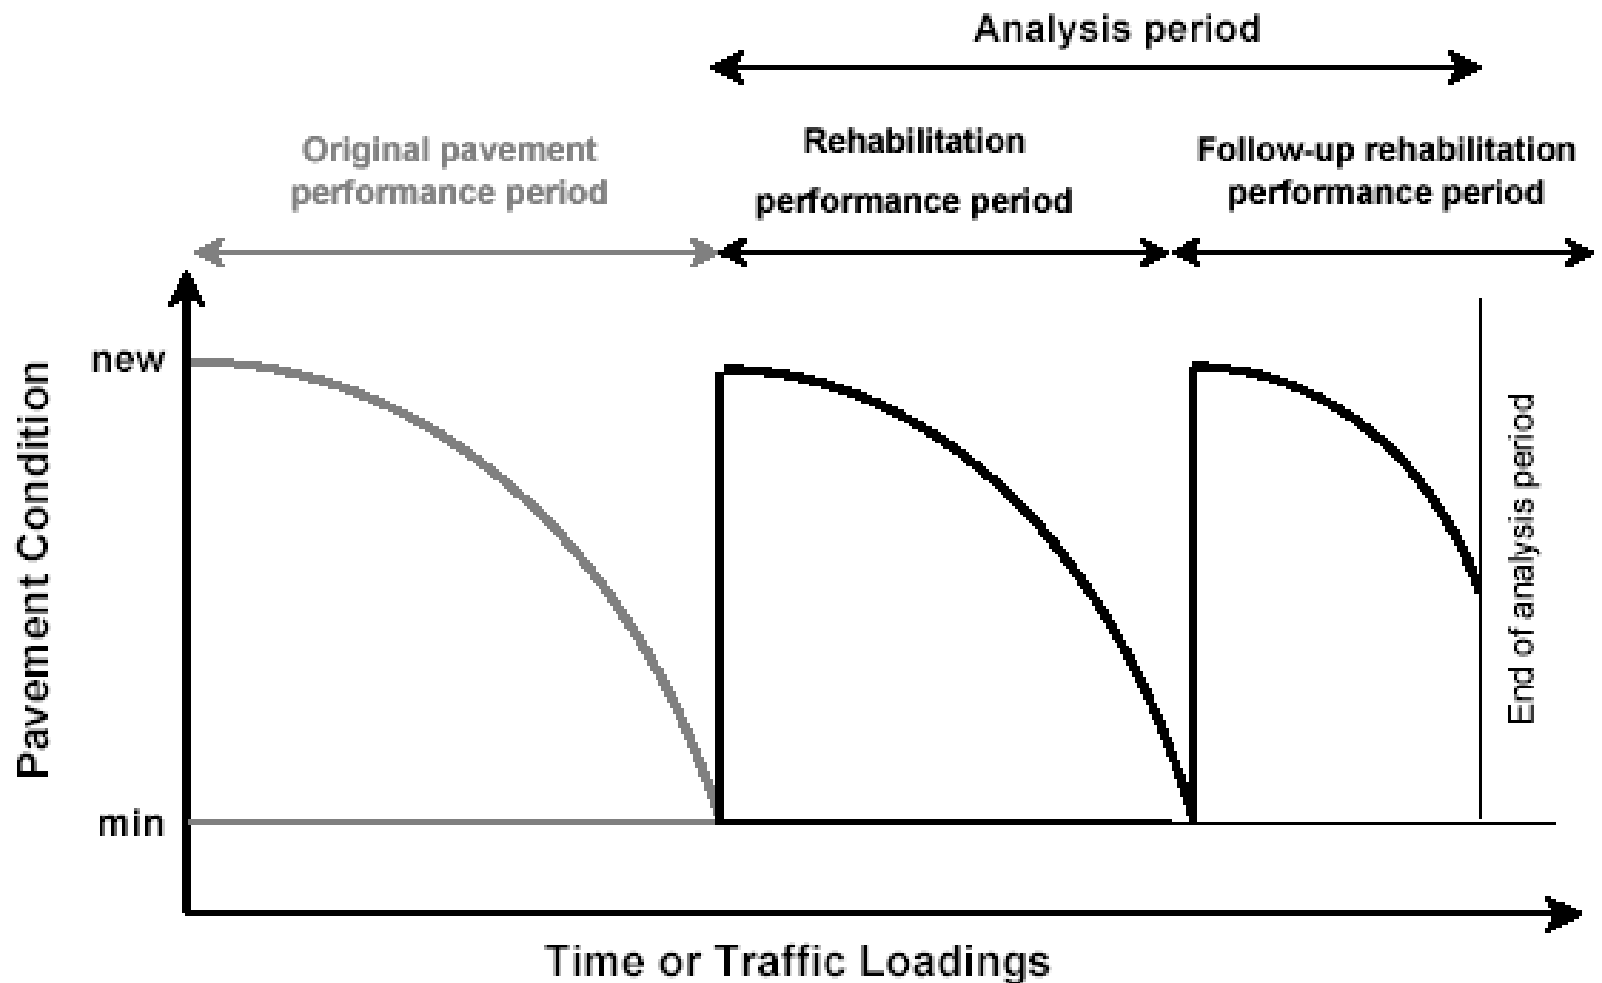


Rehabilitation strategy analysis period beginning at the end of original pavement performance period


Selection of analysis period for alternatives with common performance period, but different performance

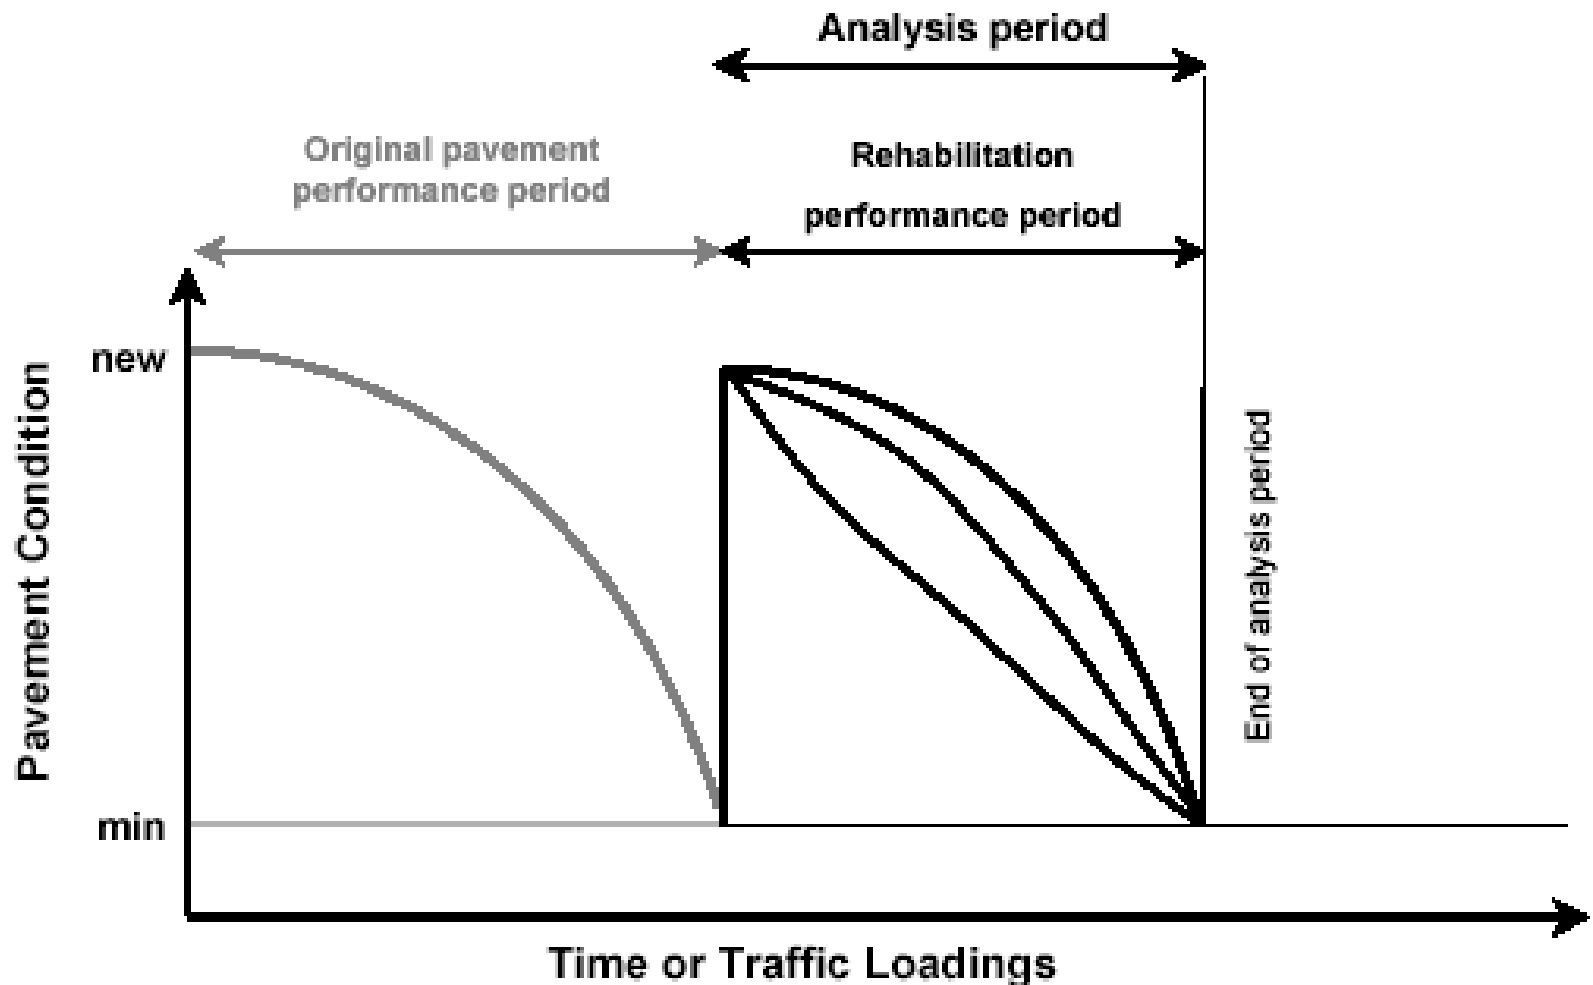

Selection of analysis period for alternatives with unequal performance periods

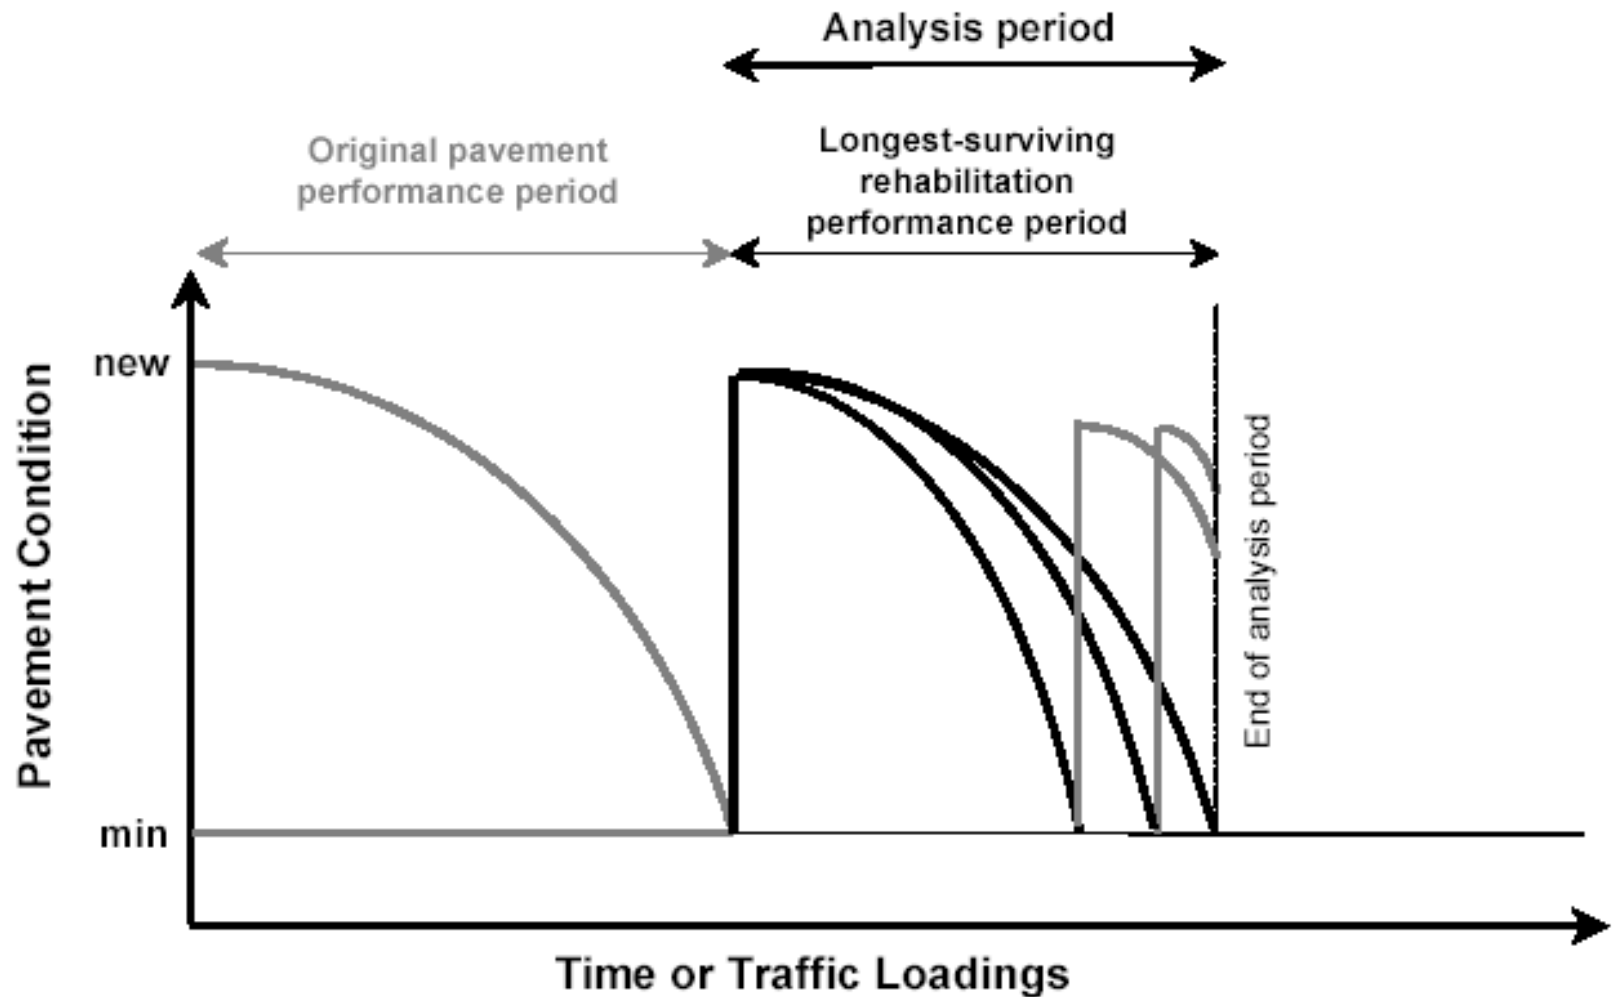

Selection of analysis period to encompass follow-up rehabilitation for all alternatives

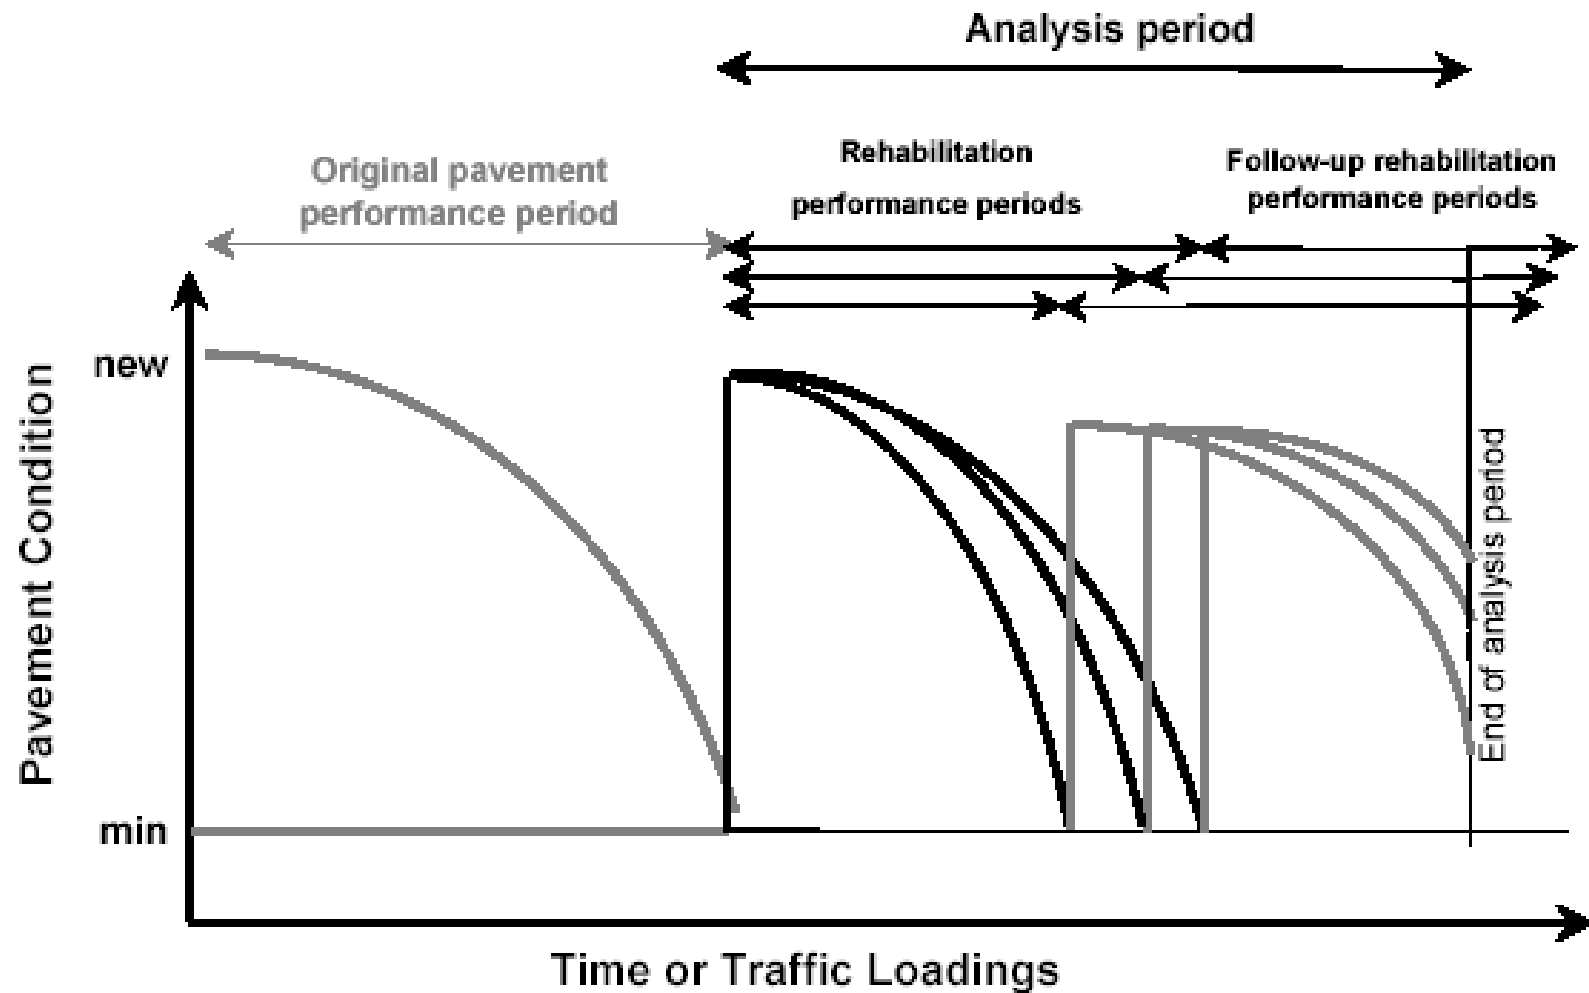

Discount Rate



- Discount rates used by State DOTs in life cycle cost analysis vary from 0 to 10 percent, with typical values between 3 and 5 percent, and overall average rate of 4 percent.

Monetary Agency Cost



- Costs associated with the alternative that are incurred by the agency during the analysis period, which can be expressed in monetary terms.

User Cost



- Costs associated with the alternative that are incurred by the users of a roadway over the analysis period, which can be expressed in monetary terms.

Categories of User Costs



- **Vehicle operating costs**
 - **fuel and oil, wear on tires and other parts, registration, insurance, and others**
- **Delay costs**
 - **due to reduced speed and/or use of alternate routes**
- **Crash costs**
 - **damage to the user's/other vehicles, public/private property, as well as injuries**

Vehicle Operating Cost



- ★ In-service vehicle operating costs are a function of pavement serviceability level, which is often difficult to estimate.
- ★ Tools are available to model these costs, such as World Bank's Highway Design and Maintenance Standards Model (HDM-III), FHWA's Highway Investment Analysis Package (HIAP-Revised), AASHTO Red Book, and others.

Delay Cost



- ✱ Costs associated with the value of time.
- ✱ Vary by vehicle class, trip type and trip purpose.
- ✱ A function of demand for use of the roadway with respect to roadway capacity.
- ✱ Work zone user delay costs may be significantly different for different rehabilitation alternatives.

Crash Cost



- ★ In-service crash rates for different roadway functional classes and crash severities are well known.
- ★ Work zone crash rates may differ significantly for different rehabilitation alternatives.

Other Monetary Costs



- ★ Those incurred by parties other than the agency or the users of the roadway.
- ★ Owners of properties and businesses adjacent to or near the route under study.
- ★ Municipalities whose sales tax receipts might be reduced during the period that the nearby businesses were adversely affected.

Salvage Value



- ★ The residual value that can be attributed to the alternative at the end of the analysis period.
- ★ The value that the item would have in the market place.
- ★ Must be defined the same way for all alternatives.

Compare Strategies



- ✿ Present Worth
- ✿ Equivalent Uniform Annual Cost
- ✿ Future Worth
- ✿ Internal Rate of Return
- ✿ External Rate of Return
- ✿ Benefit/Cost Ratio
- ✿ Payback Period
- ✿ Capitalized Worth

Sensitivity of Life Cycle Cost Analysis to Key Parameters



- Factors that are more sensitive:
- The analysis period and performance period
- The predicted traffic over the design and analysis periods
- The initial investment
- The discount rate
- The timing of follow-up maintenance and rehabilitation activities
- The quantities associated with initial and follow-up maintenance and rehabilitation

Example Problem -LCCA



- Suppose, it has been decided to rehabilitate the pavement of a 10 mile roadway segment. There are two possible alternative ways of rehabilitation.
- **Alternative A:** Asphalt concrete pavement, which has service life of 10 yrs
- **Alternative B:** Cement concrete pavement, which has service life of 15 yrs

Example Problem -LCCA



- You are required to perform “Life Cycle Cost Analysis” for both alternatives.
- Assume,
- Interest rate = 7%
- Analysis period=30 yrs
- The cost components along with the costs are shown in the following tables
- Note that the common that do not vary with the type of pavement selection are not shown in the cost tables.

Alternative A - Asphalt Concrete Pavement of Service life 10 years for each rehabilitation

Cost Cycle	Description of Costs	Year	Cost	Remarks
1st Cycle Cost (service life 10 yrs)	1st Rehabilitation Cost	0	1,500,000/mile	Includes rehabilitation design and construction
	Maintenance Cost	Each Year	1,000/mile	Includes regular maintenance, operation
	User Cost (Delay due to Construction)	0	100,000/mile	Includes extra cost to users due to delay during construction
	Crash Cost	0	1,200,000 (Total)	Includes cost due to crashes in the workzone
2nd Cycle Cost (service life 10 yrs)	2nd Rehabilitation Cost	10th	1,800,000/mile	Includes rehabilitation design and construction
	Maintenance Cost	Each Year	1,100/mile	Includes regular maintenance, operation
	User Cost (Delay due to Construction)	10th	115,000/mile	Includes extra cost to users due to delay during construction
	Crash Cost	10th	1,290,000 (Total)	Includes cost due to crashes in the workzone
3rd Cycle Cost (service life 10 yrs)	3rd Rehabilitation Cost	20th	2,100,000/mile	Includes rehabilitation design and construction
	Maintenance Cost	Each Year	1,300/mile	Includes regular maintenance, operation
	User Cost (Delay due to Construction)	20th	117,000/mile	Includes extra cost to users due to delay during construction
	Crash Cost	20th	1,470,000 (Total)	Includes cost due to crashes in the workzone

The sunk cost of initial construction of the project, the regular user cost during other than construction period and other common cost of the project are not included since they are common for both alternatives.

Alternative B - Cement Concrete Pavement of Service life 15 years for each rehabilitation

Cost Cycle	Description of Costs	Year	Cost	Remarks
1st Cycle Cost (service life 15 yrs)	1st Rehabilitation Cost	0	1,700,000/mile	Includes rehabilitation design and construction
	Maintenance Cost	Each Year	1,000/mile	Includes regular maintenance, operation
	User Cost (Delay due to Construction)	0	100,000/mile	Includes extra cost to users due to delay during construction
	Crash Cost	0	1,400,000 (Total)	Includes cost due to crashes in the workzone
2nd Cycle Cost (service life 15 yrs)	2nd Rehabilitation Cost	15th	2,100,000/mile	Includes rehabilitation design and construction
	Maintenance Cost	Each Year	1,100/mile	Includes regular maintenance, operation
	User Cost (Delay due to Construction)	15th	115,000/mile	Includes extra cost to users due to delay during construction
	Crash Cost	15th	1,570,000 (Total)	Includes cost due to crashes in the workzone


The sunk cost of initial construction of the project, the regular user cost during other than construction period and other common cost of the project are not included since they are common for both alternatives.

FHWA Software



- <http://www.fhwa.dot.gov/infrastructure/asstmgmt/ccasoft.cfm>

FHWA LCCA Software

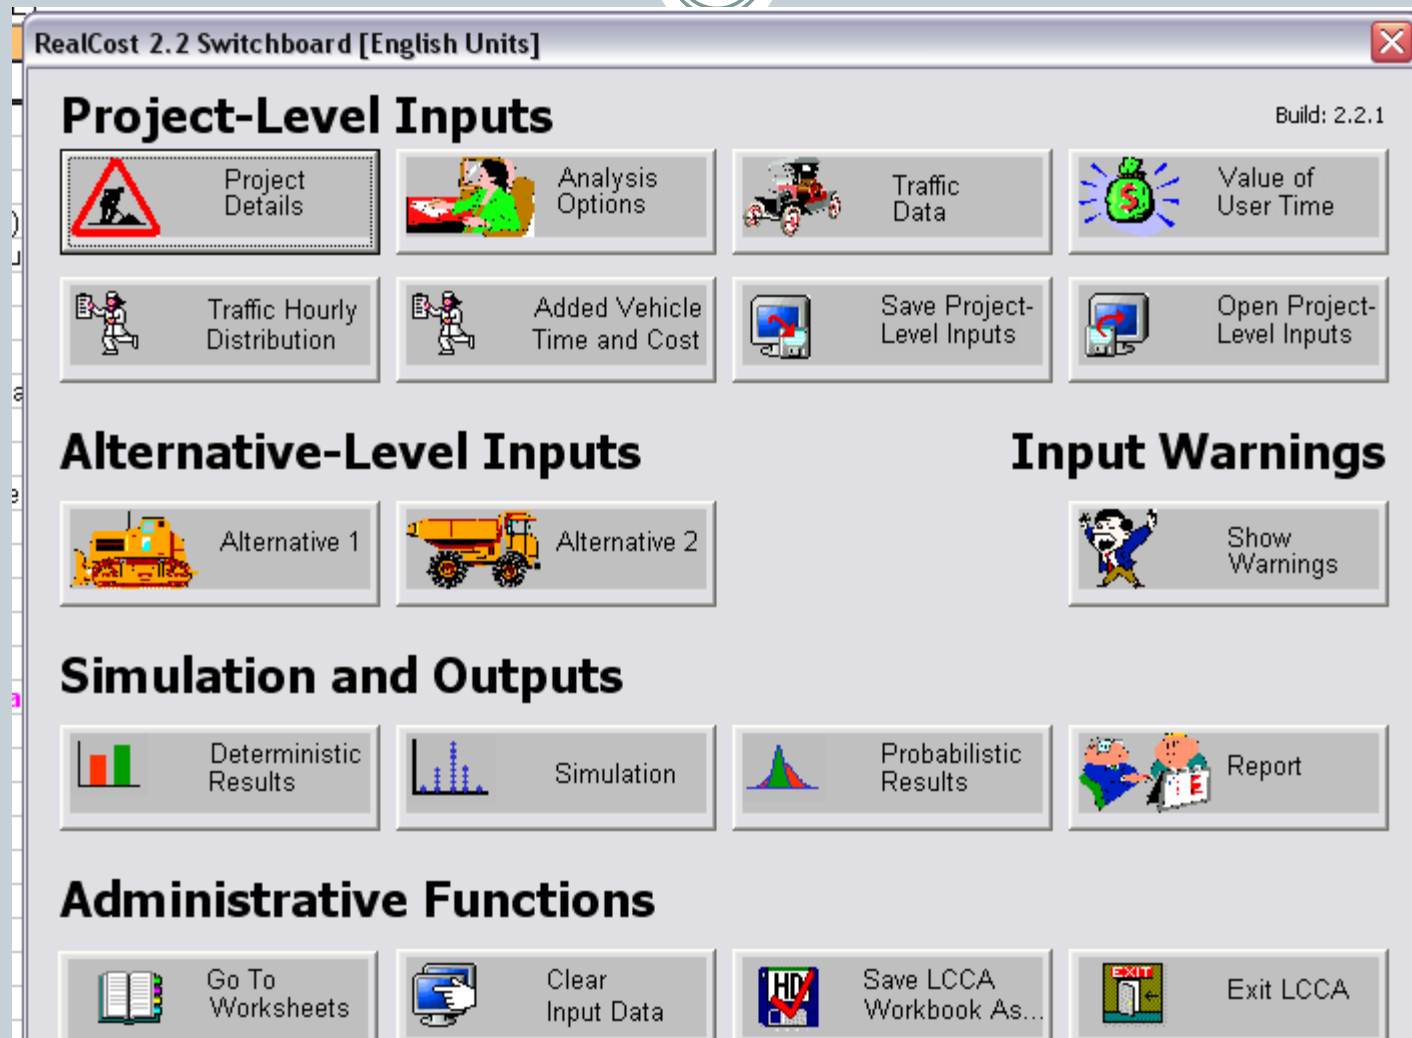

FHWA LCCA Software



REALCOST FUNCTIONS

