


### Shear and Moment Diagrams for Frames

- A **frame** is a structure composed of several members that are either fixed- or pin-connected at their ends.
- It is often necessary to draw shear and moment diagrams to design frames.



### Shear and Moment Diagrams for Frames


**Procedure for analysis** - the following is a procedure for constructing the shear and moment diagrams for a frame

1. Determine the support reactions for the frame, if possible.
2. Determine the support reactions **A**, **V**, and **M** at the end of each member using the method of sections.
3. Construct both shear and moment diagrams just as before.

We will use the following sign convention: *always draw the moment diagram on the compression side of the member.*

### Shear and Moment Diagrams for Frames

**Example:** Draw the shear and moment diagrams for the following frame:



### Shear and Moment Diagrams for Frames

First, find as many external reactions as possible.

$$\sum M_A = 0$$

$$= -9.6k(8ft.) - 16k(10ft.) + D_y(20ft.)$$

$$D_y = 11.84 k$$

$$+\uparrow \sum F_y = 0 = A_y + D_y - 16k$$


$$A_y = 4.16 k$$

$$+\rightarrow \sum F_x = 0 = A_x + 9.6k$$

$$A_x = -9.6 k$$


### Shear and Moment Diagrams for Frames

Second, cut the frame into its component members and find the internal reactions

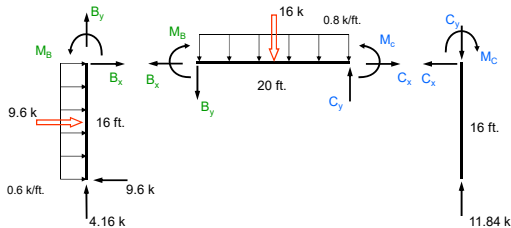

### Shear and Moment Diagrams for Frames

Next, let's start with a FBD that we can complete solve. In this example it would be either AB or CD.

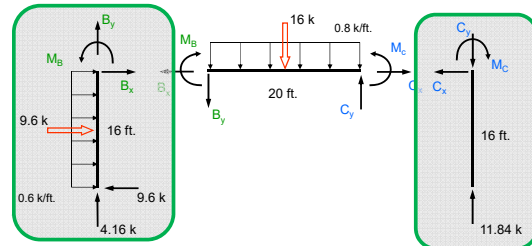

### Shear and Moment Diagrams for Frames

Let's start with member AB.

### Shear and Moment Diagrams for Frames

Let's start with member AB.

$$\sum M_B = 0 = M_B + 9.6k(8ft.) - 9.6k(16ft.)$$

$$M_B = 76.8 \text{ k ft.}$$

$$\sum F_y = 0 = 4.16k + B_y$$

$$B_y = -4.16 \text{ k}$$

$$\sum F_x = 0 = B_x - 9.6k + 9.6k$$

$$B_x = 0$$

### Shear and Moment Diagrams for Frames

Next, solve the equations of equilibrium for member CD.

$$\sum M_C = 0 = -M_C$$

$$M_C = 0$$

$$\sum F_y = 0 = 11.84k - C_y$$

$$C_y = 11.84 \text{ k}$$

$$\sum F_x = 0 = -C_x$$

$$C_x = 0$$

### Shear and Moment Diagrams for Frames

Now, let's draw the shear and moment diagram (remember to draw the diagram on the compression side of the member).

Shear Diagram:  $V(x) = 4.16 - 0.8x$

Moment Diagram:  $M(x) = 4.16x - 0.4x^2$

### Shear and Moment Diagrams for Frames


**Example:** Draw the shear and moment diagrams for the following frame:

### Shear and Moment Diagrams for Frames

**Example:** Draw the shear and moment diagrams for the following frame:


### Shear and Moment Diagrams for Frames

**Example:** Draw the shear and moment diagrams for the following frame:



### Shear and Moment Diagrams for Frames

**Example:** Draw the shear and moment diagrams for the following frame:



### Shear and Moment Diagrams for Frames

End of Part 1

Any questions?




### Shear and Moment Diagrams by Superposition

- > We have learned how to construct a moment diagram from either writing the moment as a function of  $x$  or from the slope relationship with the shear diagram.
- > If the beam or frame is linearly elastic, we can use the principles of superposition to construct moment diagrams from a series of parts rather than from a single complex shape.


### Shear and Moment Diagrams by Superposition

Most loadings on beams and frames in structural analysis can be formed as a combination of the following loadings:

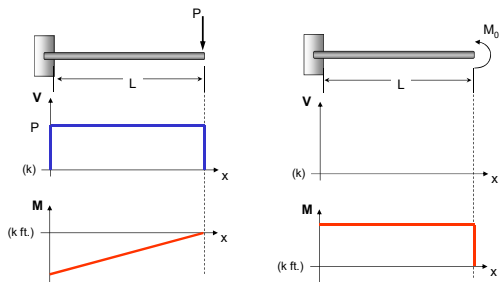


### Shear and Moment Diagrams by Superposition

Most loadings on beams and frames in structural analysis can be formed as a combination of the following loadings:

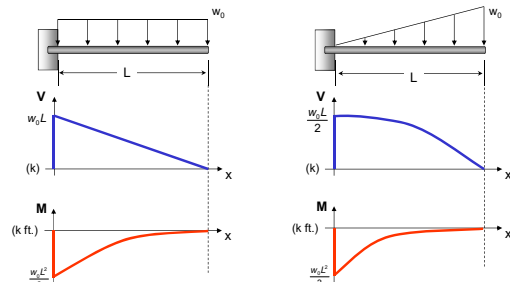


### Shear and Moment Diagrams by Superposition

**Example:** Draw the shear and moment diagrams for the following beam using superposition.

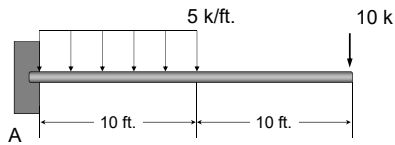


### Shear and Moment Diagrams by Superposition

The shear diagrams using superposition

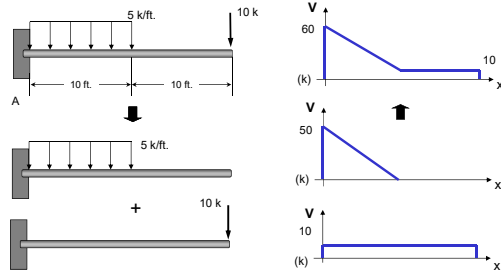


### Shear and Moment Diagrams by Superposition

The moment diagrams using superposition

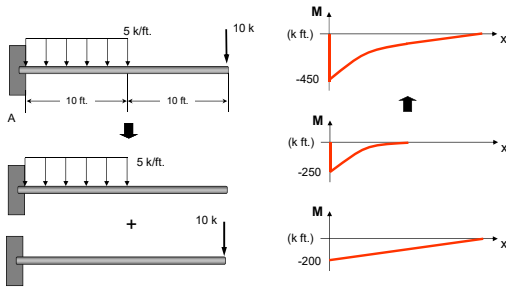


### Shear and Moment Diagrams by Superposition

**Example:** Draw the shear and moment diagrams for the following beam using superposition:




### Shear and Moment Diagrams by Superposition

**Example:** Draw the shear and moment diagrams for the following beam using superposition:

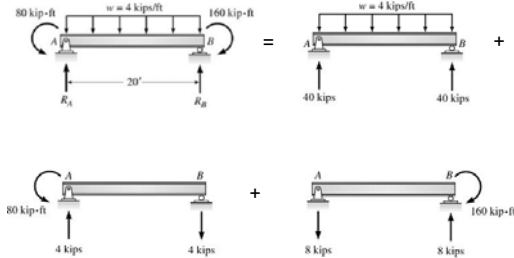


### Shear and Moment Diagrams by Superposition

**Example:** Draw the shear and moment diagrams for the following beam using superposition:

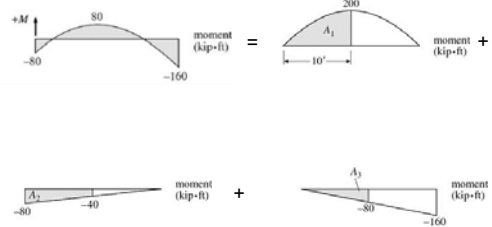

## Shear and Moment Diagrams by Superposition

**Example:** Draw the shear and moment diagrams for the following beam using superposition.

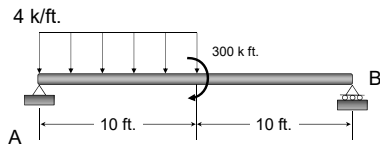

## Shear and Moment Diagrams for Frames

End of Part 2

Any questions?

