



Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant.


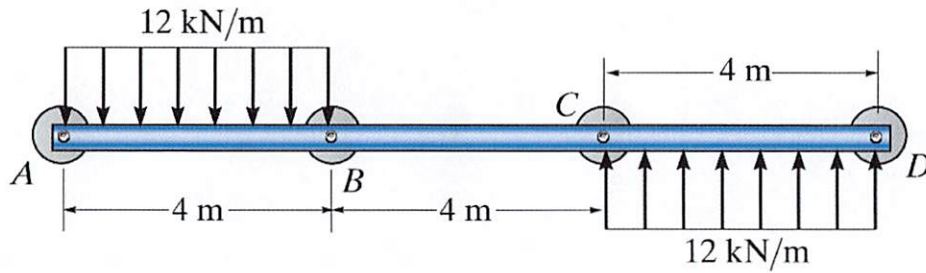


3 EQUATIONS OF EQUILIBRIUM





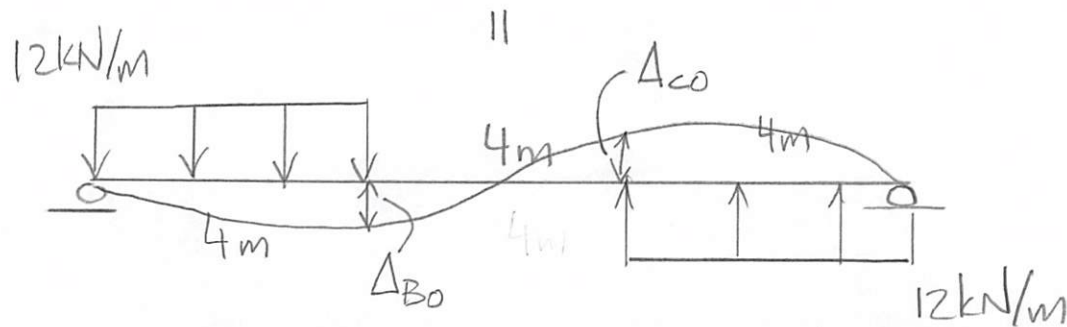


$$\underline{\Delta_B = 0 = \Delta_{B0} + B_y f_{BB} + C_y f_{BC}}$$

$$\underline{\Delta_C = 0 = \Delta_{C0} + B_y f_{CB} + C_y f_{CC}}$$

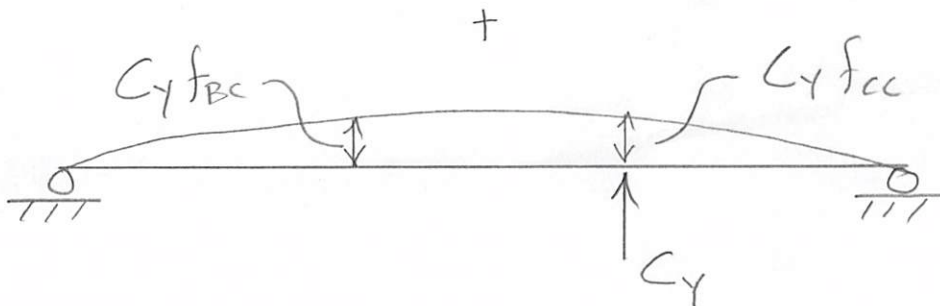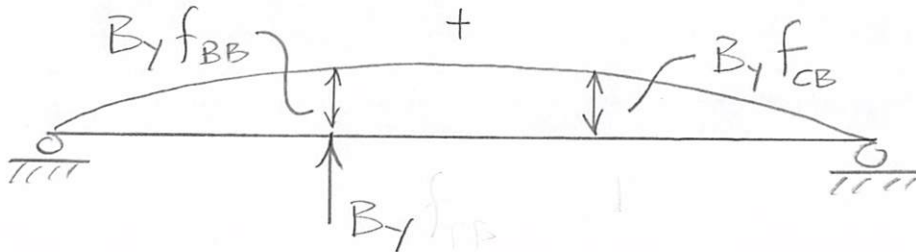





Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant. 2

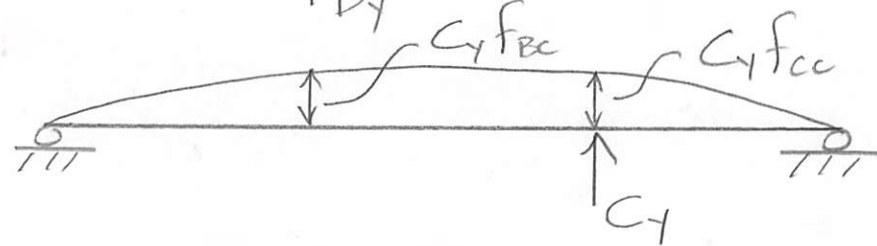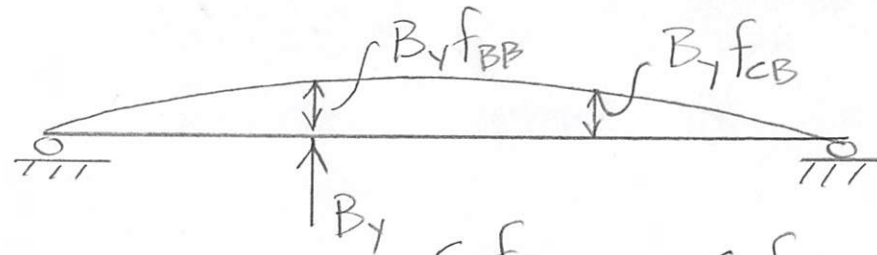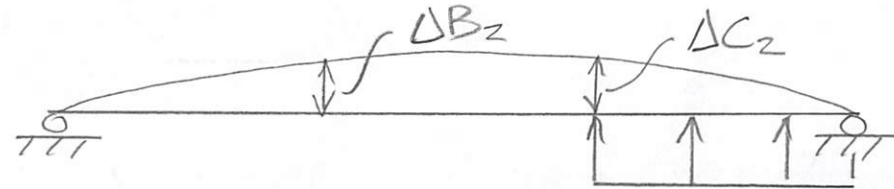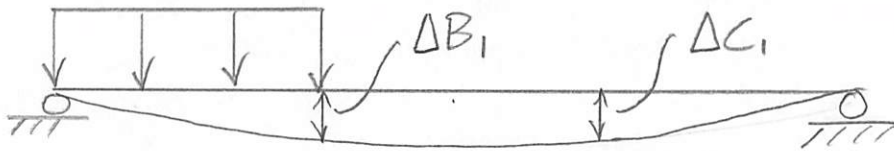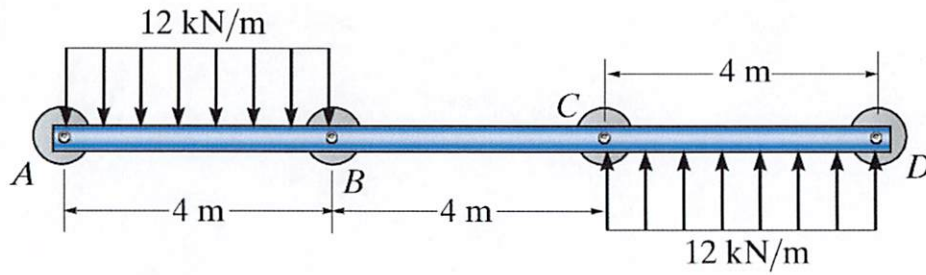

$$\Delta_B = 0 = \Delta B_1 + \Delta B_2 + B_y f_{BB} + C_y f_{BC}$$

$$\Delta_C = 0 = \Delta C_1 + \Delta C_2 + B_y f_{CB} + C_y f_{CC}$$

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant. 3

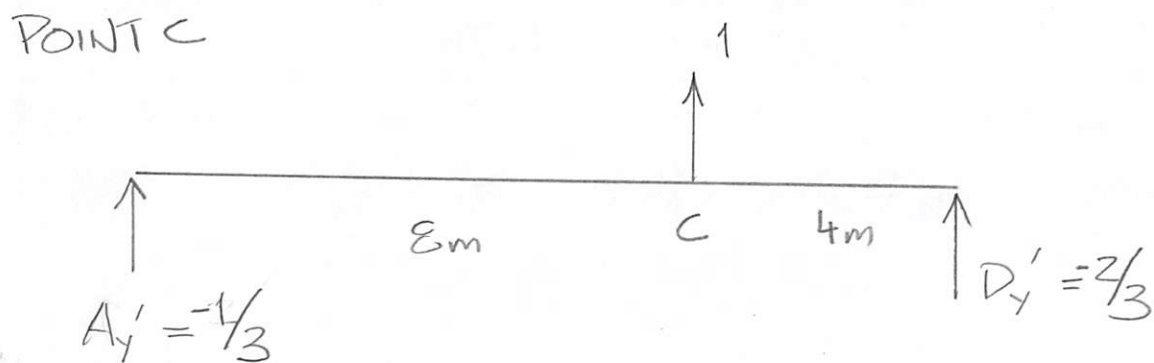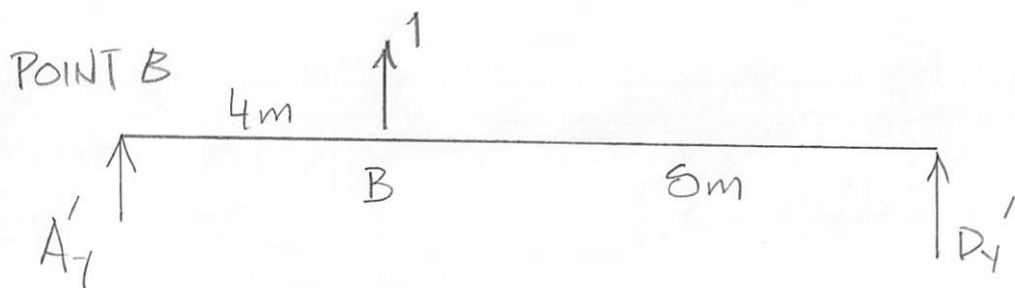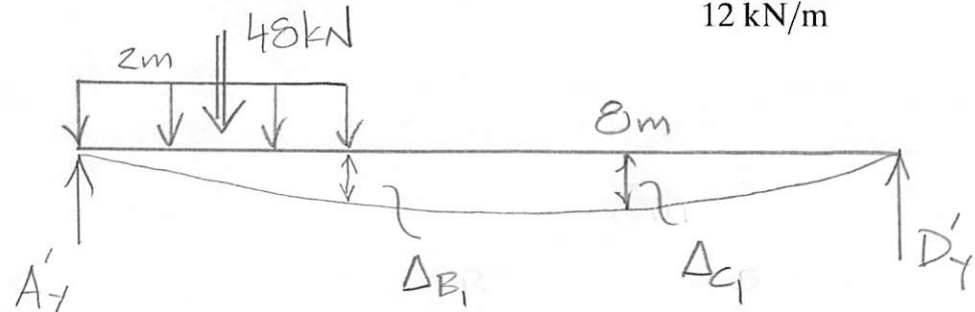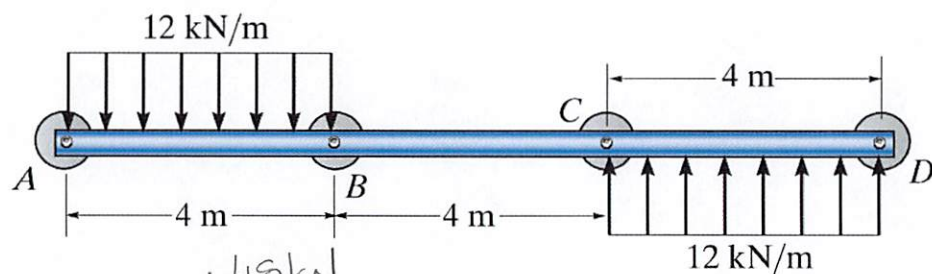

* USE VIRTUAL WORK TO COMPUTE Δ_{B_0} & Δ_{C_0}

$$\sum M_D = 0 = 48 \text{ kN}(10 \text{ m}) - A'_y(12 \text{ m})$$

$$A'_y = 40 \text{ kN}$$

$$\sum F_y = 0 = A'_y + D'_y - 48 \text{ kN}$$

$$D'_y = 8 \text{ kN}$$


$$\sum M_D = 0 = -1(8 \text{ m}) - A'_y(12 \text{ m})$$

$$A'_y = -2/3$$

$$\sum F_y = 0 = A'_y + D'_y + 1$$

$$D'_y = -1/3$$

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant. 4

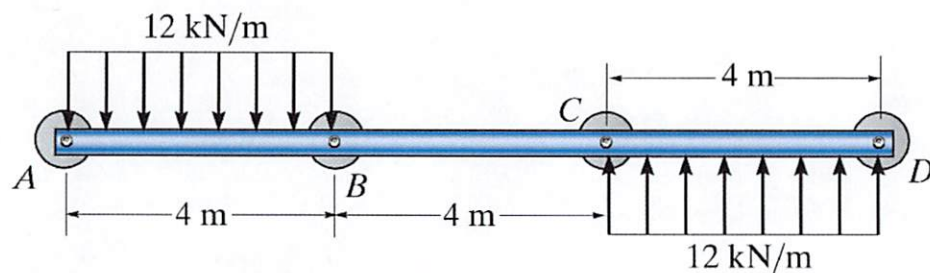

REAL MOMENTS

$$0 \leq x \leq 4$$

$$\sum M_{\text{cut}} = 0$$

$$= M_1 + 12x\left(\frac{x}{2}\right) - 40x$$

$$M_1 = [-6x^2 + 40x] \text{ kNm}$$

$$4 \leq x \leq 12$$

$$\sum M_{\text{cut}} = 0$$

$$= -M_2 + 8(12-x)$$

$$M_2 = [8(12-x)] \text{ kNm}$$

$$\Delta_{B_1} = \frac{1}{EI} \left[\int_0^4 M_1 m_1 dx + \int_4^{12} M_2 m_2 dx \right]$$

$$= \frac{1}{EI} \left[\int_0^4 \frac{2x}{3} (6x^2 - 40x) dx + \int_4^{12} -\frac{8}{3} (12-x)^2 dx \right]$$

$$= -768 \text{ kNm}^3 / EI$$

FIND Δ_{B_1}

VIRTUAL MOMENTS

$$0 \leq x \leq 4$$

$$\sum M_{\text{cut}} = 0$$

$$= m_1 + \frac{2}{3}x$$

$$m_1 = -\frac{2}{3}x$$


$$4 \leq x \leq 12$$

$$\sum M_{\text{cut}} = 0$$

$$= -m_2 - \frac{1}{3}(12-x)$$

$$m_2 = -\frac{1}{3}(12-x)$$

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant.

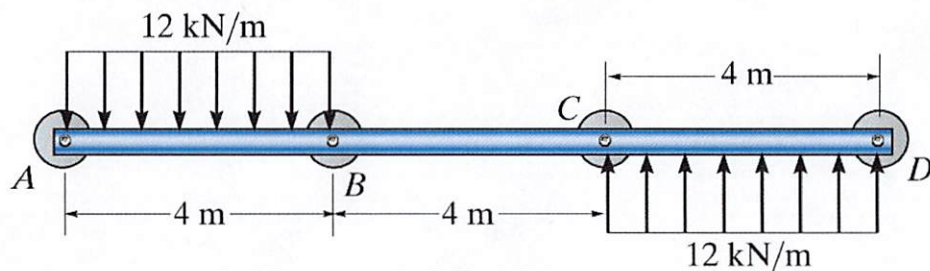

FIND Δ_C

VIRTUAL MOMENTS

$0 \leq x \leq 8$

$$\begin{aligned} \sum M_{cut} &= 0 \\ &= m_1 + \frac{1}{3}x \\ \underline{m_1} &= \underline{-\frac{x}{3}} \end{aligned}$$


$8 \leq x \leq 12$

$$\begin{aligned} \sum M_{cut} &= 0 \\ &= -m_2 - \frac{2}{3}(12-x) \\ \underline{m_2} &= \underline{-\frac{2}{3}(12-x)} \end{aligned}$$

$$\begin{aligned} \Delta_C &= \frac{1}{EI} \left[\int_0^4 M_1 m_1 dx + \int_4^8 M_2 m_1 dx + \int_8^{12} M_2 m_2 dx \right] \\ &= \frac{1}{EI} \left[\int_0^4 \frac{x}{3} (6x^2 - 40x) dx + \int_4^8 -\frac{8x}{3} (12-x) dx + \int_8^{12} \frac{16}{3} (12-x)^2 dx \right] \\ &= \underline{\underline{-\frac{640 \text{ kNm}^3}{EI}}} \end{aligned}$$

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant.

6

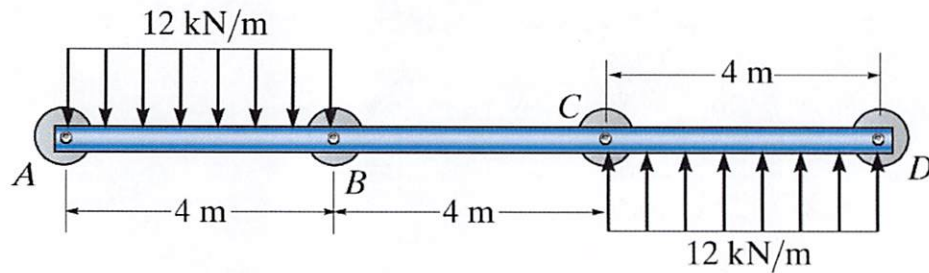

$$\Delta B_1 = -\Delta C_2 \quad \Delta C_1 = -\Delta B_2$$

* FROM TABLE, WE CAN FIND f

$$f_{BB} = \frac{Pbx}{6LEI} (L^2 - b^2 - x^2)$$

$$L = 12\text{m}, x = 8\text{m}, b = 4\text{m}, q = 8\text{m}$$

$$f_{BB} = \frac{256\text{m}^3}{9EI}$$


$$f_{CB} = \frac{Pbx}{6LEI} [L^2 - b^2 - x^2]$$

$$L = 12\text{m}, x = 4\text{m}, b = 4\text{m}, a = 8\text{m}$$


$$f_{CB} = \frac{224\text{m}^3}{9EI}$$

$$\underline{f_{CC} = f_{BB}}$$

$$\underline{f_{CB} = f_{BC}}$$

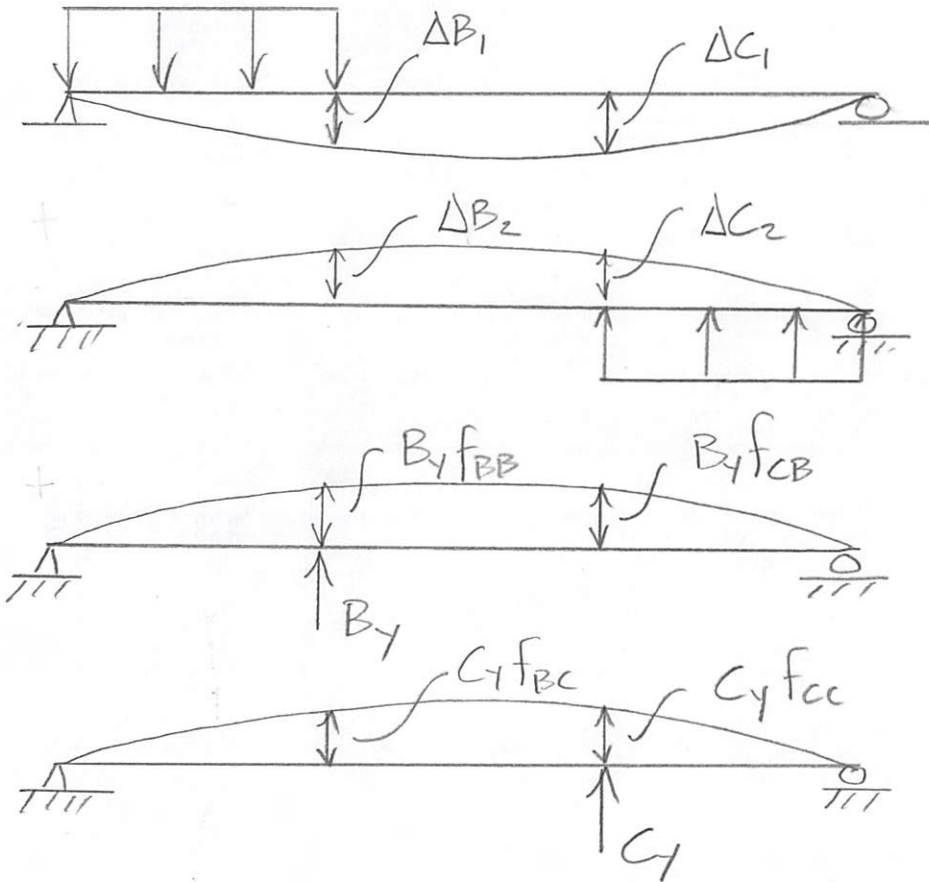

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant. 7

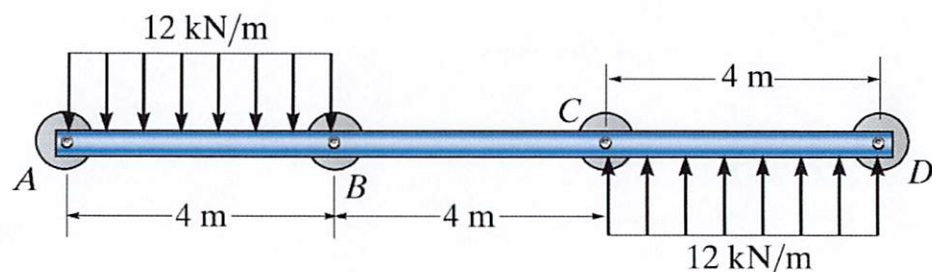

$$\Delta_B = 0 = \Delta B_1 + \Delta B_2 + B_y f_{BB} + C_y f_{BC}$$

$$= \frac{1}{EI} \left[-768 + 640 + \frac{256}{9} B_y + \frac{224}{9} C_y \right] \text{ kNm}^3 \quad (1)$$

$$\Delta_C = 0 = \Delta C_1 + \Delta C_2 + B_y f_{CB} + C_y f_{CC}$$



$$= \frac{1}{EI} \left[768 - 640 + \frac{224}{9} B_y + \frac{256}{9} C_y \right] \text{ kNm}^3 \quad (2)$$

$$(1) + (2) \Rightarrow \underline{C_y = -B_y}$$

$$(1) \Rightarrow 1,152 = 256 B_y + 224(-B_y) \Rightarrow 1,152 = 32 B_y \quad \underline{\underline{B_y = 36 \text{ kN}}}$$

$$\underline{\underline{C_y = -36 \text{ kN}}}$$

Problem 11-6 – Determine the support reactions. The supports at A, B, C, and D are pins. Assume the horizontal reactions are zero. EI is constant. 8

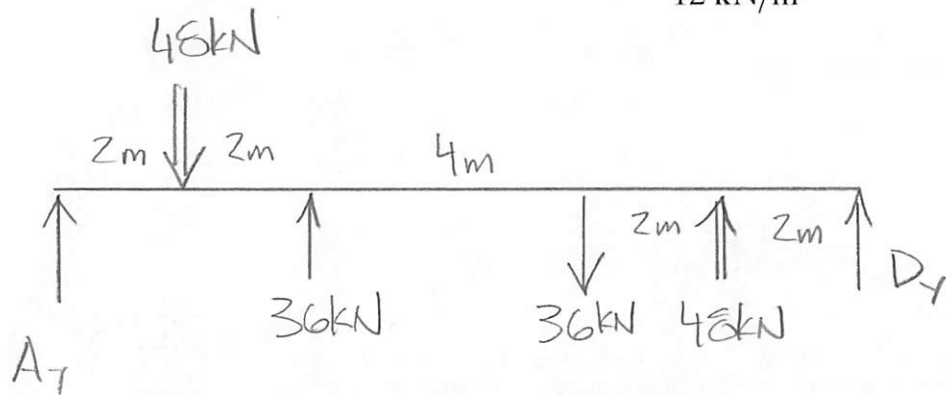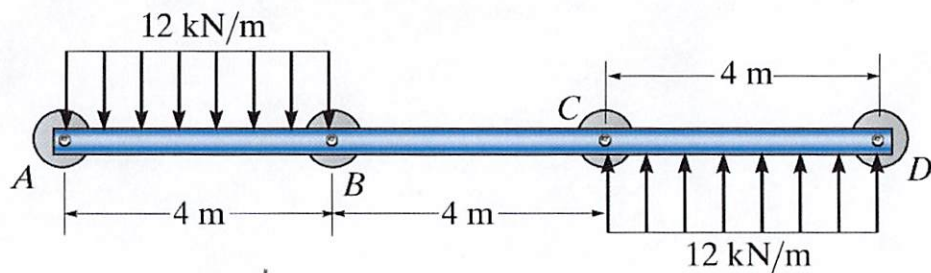

$$\begin{aligned} \sum M_D = 0 &= 48 \text{ kN}(10 \text{ m}) - 36 \text{ kN}(8 \text{ m}) \\ &+ 36 \text{ kN}(4 \text{ m}) - 48 \text{ kN}(2 \text{ m}) \\ &- A_y(12 \text{ m}) \end{aligned}$$

$$\underline{\underline{A_y = 20 \text{ kN}}}$$

$$\begin{aligned} + \uparrow \sum F_y = 0 &= A_y + D_y - 48 \text{ kN} + 48 \text{ kN} \\ &+ 36 \text{ kN} - 36 \text{ kN} \end{aligned}$$

$$D_y = -A_y$$

$$\underline{\underline{D_y = -20 \text{ kN}}}$$